

CYCLONE TRIMLESS

ARCHITECTURAL RECESSED LUMINAIRES




*An opal circular luminaire with a contemporary design.
CYCLONE is a piece of architecture, perfect for adding stature to an area.
With it's gentle uniform lighting, it upgrades areas such as lobbies, corridors, offices, stores and homes.*

Technical Features

- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- Direct illumination.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation on 230V/50Hz.




Upon Request

- Connection for emergency lighting system, for one or three hours.
- With microprismatic cover (only for Cyclone Slim Trimless version)*.



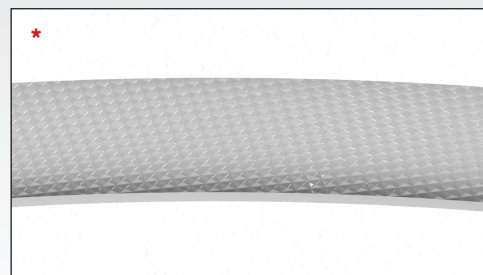


CYCLONE TRIMLESS


CYCLONE TRIMLESS

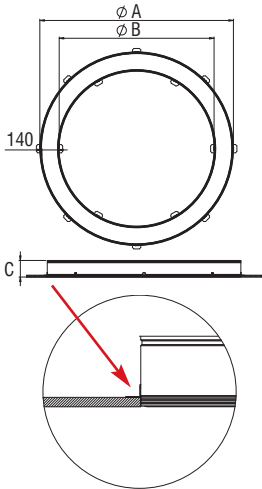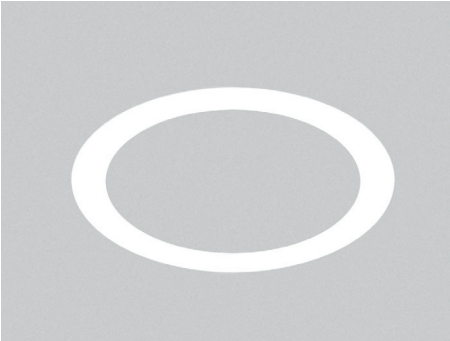

CYCLONE SLIM TRIMLESS

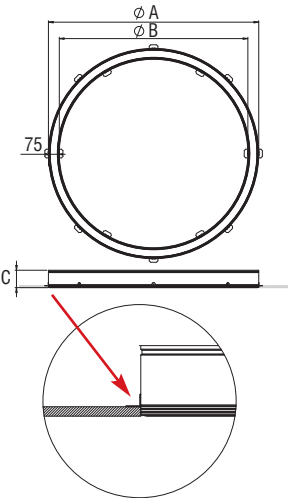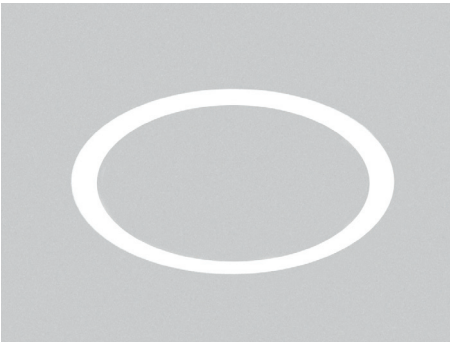


ARCHITECTURAL RECESSED LUMINAIRES



- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
203 Lm/W at 4000K 300mA
192 Lm/W at 3000K 300mA

Code	Description	Dimensions mm		
		ØA	ØB	C
82420121	Cyclone 1 43W Warm	700	420	120
82420131	Cyclone 1 43W Neutral	700	420	120
82420221	Cyclone 2 56W Warm	900	620	120
82420231	Cyclone 2 56W Neutral	900	620	120
82420321	Cyclone 3 79W Warm	1200	920	120
82420331	Cyclone 3 79W Neutral	1200	920	120
82420421	Cyclone 4 92W Warm	1400	1120	120
82420431	Cyclone 4 92W Neutral	1400	1120	120

For dimmer version add letter “D” at the end of product code.



- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
203 Lm/W at 4000K 300mA
192 Lm/W at 3000K 300mA

Code	Description	Dimensions mm		
		ØA	ØB	C
82420521	Cyclone Slim 1 38W Warm *	600	450	120
82420531	Cyclone Slim 1 38W Neutral *	600	450	120
82420621	Cyclone Slim 2 52W Warm	800	650	120
82420631	Cyclone Slim 2 52W Neutral	800	650	120
82420721	Cyclone Slim 3 79W Warm	1100	950	120
82420731	Cyclone Slim 3 79W Neutral	1100	950	120
82420821	Cyclone Slim 4 99W Warm	1450	1300	120
82420831	Cyclone Slim 4 99W Neutral	1450	1300	120

For dimmer version add letter “D” at the end of product code.
* At dimmer version the driver is placed out of the body.

CYCLONE TRIMLESS

ARCHITECTURAL RECESSED LUMINAIRES





CYCLONE TRIMLESS

ARCHITECTURAL RECESSED LUMINAIRES





CYCLONE TRIMLESS

CYCLONE TR TRIMLESS

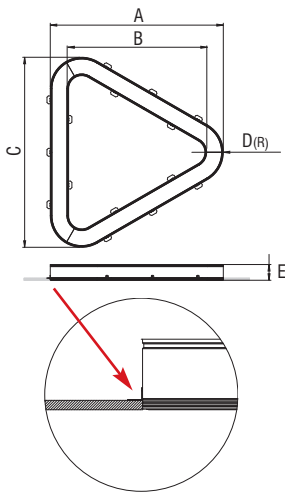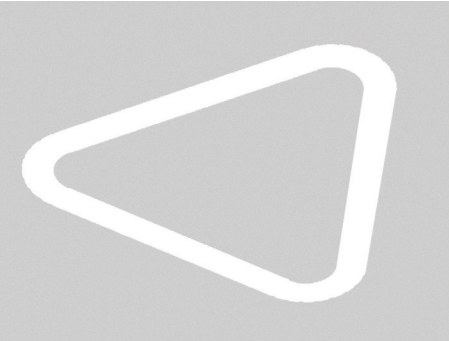

CYCLONE SLIM TR TRIMLESS

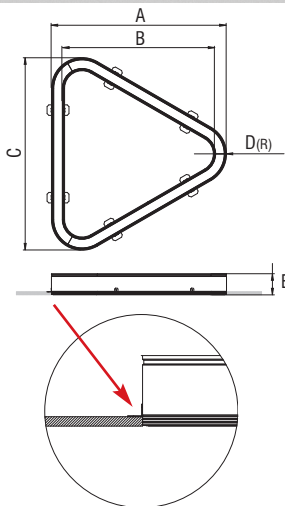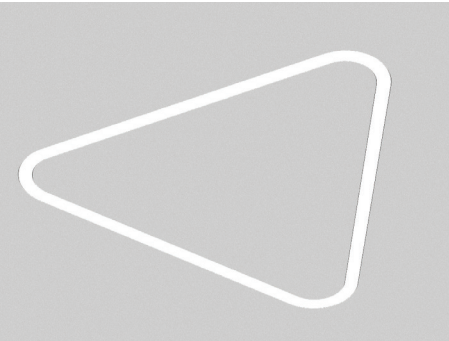

ARCHITECTURAL RECESSED LUMINAIRES



- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
203 Lm/W at 4000K 300mA
192 Lm/W at 3000K 300mA

Code	Description	Dimensions mm				
		ØA	ØB	C	D(R)	E
82421721	Cyclone 1 TR 53W Warm	760	480	800	240	120
82421731	Cyclone 1 TR 53W Neutral	760	480	800	240	120
82421821	Cyclone 2 TR 75W Warm	1020	740	1100	240	120
82421831	Cyclone 2 TR 75W Neutral	1020	740	1100	240	120
82421921	Cyclone 3 TR 96W Warm	1320	1040	1450	240	120
82421931	Cyclone 3 TR 96W Neutral	1320	1040	1450	240	120

For dimmer version add letter “D” at the end of product code.





- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
203 Lm/W at 4000K 300mA
192 Lm/W at 3000K 300mA

Code	Description	Dimensions mm				
		ØA	ØB	C	D(R)	E
82422021	Cyclone Slim 1 TR 50W Warm	700	550	750	175	120
82422031	Cyclone Slim 1 TR 50W Neutral	700	550	750	175	120
82422121	Cyclone Slim 2 TR 75W Warm	1000	850	1100	175	120
82422131	Cyclone Slim 2 TR 75W Neutral	1000	850	1100	175	120
82422221	Cyclone Slim 3 TR 96W Warm	1300	1150	1450	175	120
82422231	Cyclone Slim 3 TR 96W Neutral	1300	1150	1450	175	120



For dimmer version add letter “D” at the end of product code.

CYCLONE TRIMLESS

CYCLONE SQ TRIMLESS

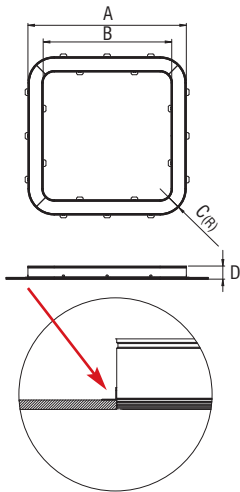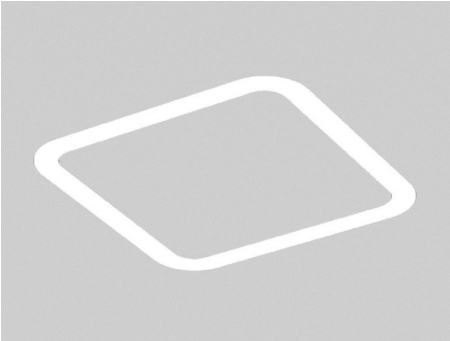

CYCLONE SLIM SQ TRIMLESS

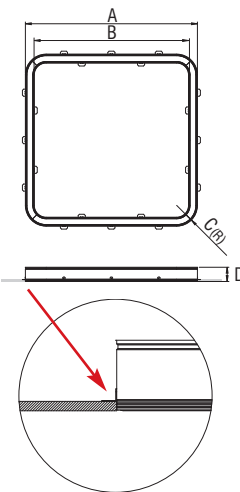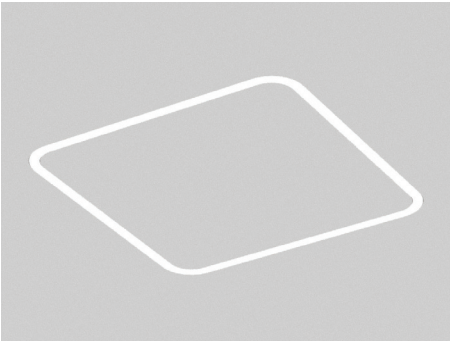

ARCHITECTURAL RECESSED LUMINAIRES



- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
203 Lm/W at 4000K 300mA
192 Lm/W at 3000K 300mA

Code	Description	Dimensions mm			
		A	B	C(R)	D
82422321	Cyclone 1 SQ 56W Warm	800	520	240	120
82422331	Cyclone 1 SQ 56W Neutral	800	520	240	120
82422421	Cyclone 2 SQ 85W Warm	1100	820	240	120
82422431	Cyclone 2 SQ 85W Neutral	1100	820	240	120
82422521	Cyclone 3 SQ 113W Warm	1450	1170	240	120
82422531	Cyclone 3 SQ 113W Neutral	1450	1170	240	120

For dimmer version add letter “D” at the end of product code.



- Aluminium body, painted electrostatically in selected colour.
- High efficient satin cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
203 Lm/W at 4000K 300mA
192 Lm/W at 3000K 300mA

Code	Description	Dimensions mm			
		A	B	C(R)	D
82422621	Cyclone Slim 1 SQ 70W Warm	850	700	175	120
82422631	Cyclone Slim 1 SQ 70W Neutral	850	700	175	120
82422721	Cyclone Slim 2 SQ 99W Warm	1150	1000	175	120
82422731	Cyclone Slim 2 SQ 99W Neutral	1150	1000	175	120
82422821	Cyclone Slim 3 SQ 126W Warm	1450	1300	175	120
82422831	Cyclone Slim 3 SQ 126W Neutral	1450	1300	175	120

For dimmer version add letter “D” at the end of product code.

CYCLONE TRIMLESS

ARCHITECTURAL RECESSED LUMINAIRES



CYCLONE TRIMLESS

ARCHITECTURAL RECESSED LUMINAIRES

