



Surface wall mounted luminaire with halogen or fluorescent lamps. It is ideal for a wide range of outdoor applications due to its high protection degree IP65. Available with one or two-way light distribution and with different beam angles.

Technical Features

- Aluminium body, painted electrostatically in selected colour.
- Die-cast aluminium lampholder - mounting base.
- Tempered protection glass.
- Silicone sealant.
- Beam-angle configuration diaphragm made of aluminium.

Upon request


- Special beam editions.



H07RN-F

To ensure the degree of protection (sealing), the use of flexible power supply cable type H07RN-F (in appropriate diameter) is required.

Versions

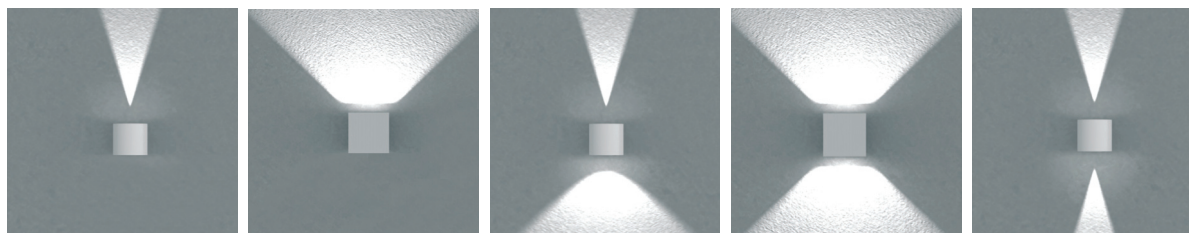

BEAM 1 - ONE WAY
40°

BEAM 2 - ONE WAY
100°

BEAM 1 - TWO WAY
40° / 100°


BEAM 2 - TWO WAY
100° / 100°

BEAM 1 - TWO WAY
40° / 40°

BEAM 1/2 IP65

OUTDOOR


BEAM 1 - ONE WAY



- For QT 14/G9 lamp.
- Aluminium body.

Code	Description	Kg
85727	BEAM1 - ONE WAY G9 40°	0,950
85728	BEAM1 - ONE WAY G9 100°	0,950



BEAM 1 - TWO WAY



- For QT 14/G9 lamp.
- Aluminium body.

Code	Description	Kg
85721	BEAM1 - TWO WAY G9 40° / 100°	0,950
85722	BEAM1 - TWO WAY G9 100° / 100°	0,950
85723	BEAM1 - TWO WAY G9 40° / 40°	0,950



BEAM 2 - ONE WAY



- For QT 14/G9 lamp.
- Aluminium body.

Code	Description	Kg
85729	BEAM2 - ONE WAY G9 40°	1,500
85730	BEAM2 - ONE WAY G9 100°	1,500

BEAM 2 - TWO WAY



- For QT 14/G9 lamp.
- Aluminium body.

Code	Description	Kg
85724	BEAM2 - TWO WAY G9 40° / 100°	1,500
85725	BEAM2 - TWO WAY G9 100° / 100°	1,500
85726	BEAM2 - TWO WAY G9 40° / 40°	1,500

0

Colours

1

White

2

Titan

3

Black

4

Chrome

BEAM 1/2 IP65

OUTDOOR



BEAM 1/2 IP65

OUTDOOR

