



*Surface wall mounted luminaire with power LED chip. It is ideal for a wide range of outdoor applications due to its high protection degree IP65. Available with one or two-way light distribution and with different beam angles.*

### Technical Features

- Aluminium body, painted electrostatically in selected colour.
- Mounting base from die-cast aluminium.
- Tempered protection glass.
- Beam distribution lens.
- Silicone sealant.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).

### Upon request:

Available with highest colour rendering index (CRI)





**H07RN-F** To ensure the degree of protection (sealing), the use of flexible power supply cable type H07RN-F (in appropriate diameter) is required.

# BEAM 5/6 LED IP65

OUTDOOR


## BEAM 5 - ONE WAY

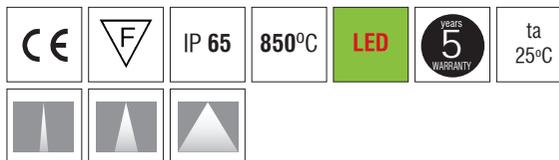


- Beams: Spot, Medium, Wide.
- Dimmer Phase Cut.
- Power Led 230V AC/50Hz.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:  
4000 K: 122 Lm/Watt  
3000 K: 115 Lm/Watt

| Code  | Description          | Kg    |
|-------|----------------------|-------|
| 85751 | BEAM5 ONE WAY LED 4W | 0,700 |


SPOT





MEDIUM



WIDE



## BEAM 5 - TWO WAY

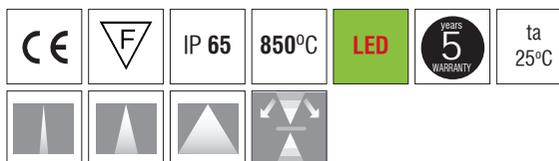



- Beams: Spot, Medium, Wide.
- Dimmer Phase Cut.
- Power Led 230V AC/50Hz.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:  
4000 K: 122 Lm/Watt  
3000 K: 115 Lm/Watt

| Code  | Description            | Kg    |
|-------|------------------------|-------|
| 85756 | BEAM5 TWO WAY LED 4+4W | 1,000 |

# BEAM 5/6 LED IP65

OUTDOOR


## BEAM 6 - ONE WAY

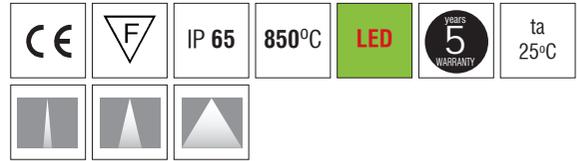


- Beams: Spot, Medium, Wide.
- Dimmer Phase Cut.
- Power Led 230V AC/50Hz.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:  
4000 K: 122 Lm/Watt  
3000 K: 115 Lm/Watt

| Code  | Description          | Kg    |
|-------|----------------------|-------|
| 85761 | BEAM6 ONE WAY LED 4W | 1,200 |


### SPOT




### MEDIUM



### WIDE



## BEAM 6 - TWO WAY



- Beams: Spot, Medium, Wide.
- Dimmer Phase Cut.
- Power Led 230V AC/50Hz.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:  
4000 K: 122 Lm/Watt  
3000 K: 115 Lm/Watt

| Code  | Description            | Kg    |
|-------|------------------------|-------|
| 85766 | BEAM6 TWO WAY LED 4+4W | 1,500 |

#### LED COLOUR CODES:

2 Warm 3 Neutral

#### Beams Codes:

10 spot/spot 30 medium/medium 45 wide/wide 90 spot/medium 91 spot/wide 92 medium/wide

#### Colour Codes:

0 Colours 1 White 2 Titan 3 Black 4 Chrome 5 matt Alum.

