



This luminaire combines the architectural style with the efficiency. It produces perfect lighting conditions without annoying reflections and that is why it can be used from entrance areas to offices. It escapes the restrictions of the T16 lamp by using LED lighting points that can have any spacing pitch and this gives the light line enormous flexibility.

The visual benefit: The continuous-row system is illuminated absolutely uniformly from beginning to end, is economically efficient, is maintenance-free and it has long service life.

Technical Features



- Housing from aluminium profile, painted electrostatically in selected colour.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- Pure light without IR/UV radiation.
- Efficient thermal management.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation on 230V-50/60Hz.

Upon request:

- Available with highest colour rendering index (CRI).
- Available in IP54 protection version.
- Connection for emergency lighting system, for one or three hours.

STREAMLIGHT

STREAMLIGHT LED

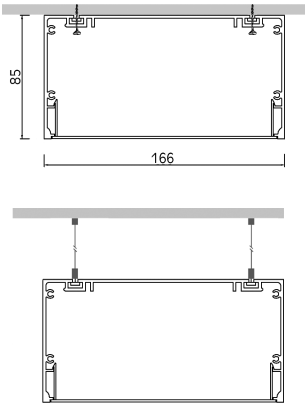

PROFESSIONAL SURFACE & PENDANT LUMINAIRES





- Aluminium body.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
201 Lm/Watt at 4000K 350mA
189 Lm/Watt at 3000K 350mA

Code	Description	L	Kg
91573	Streamlight Led 16W Neutral	600	3,200
91574	Streamlight Led 33W Neutral	1160	4,270
91575	Streamlight Led 49W Neutral	1720	5,970
91576	Streamlight Led 65W Neutral	2280	8,600
91577	Streamlight Led 16W Warm	600	3,200
91578	Streamlight Led 33W Warm	1160	4,270
91579	Streamlight Led 49W Warm	1720	5,970
91580	Streamlight Led 65W Warm	2280	8,600

For dimmer version add letter “D” at the end of product code.

STREAMLIGHT ANAGLYPH LED



- Aluminium body.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
201 Lm/Watt at 4000K 350mA
189 Lm/Watt at 3000K 350mA

Code	Description	L	Kg
91773	Streamlight An.Led 16W Neutral	600	3,400
91774	Streamlight An.Led 33W Neutral	1160	6,560
91775	Streamlight An.Led 49W Neutral	1720	9,700
91776	Streamlight An.Led 65W Neutral	2280	12,900
91777	Streamlight An.Led 16W Warm	600	3,400
91778	Streamlight An.Led 33W Warm	1160	6,560
91779	Streamlight An.Led 49W Warm	1720	9,700
91780	Streamlight An.Led 65W Warm	2280	12,900

For dimmer version add letter “D” at the end of product code.

Colour Codes:

0

 Colours

1

 White

2

 Titan

3

 Black

5


 matt Alum.

9

 Anodized

STREAMLIGHT

STREAMLIGHT PLEXI OPAL CARRE LED

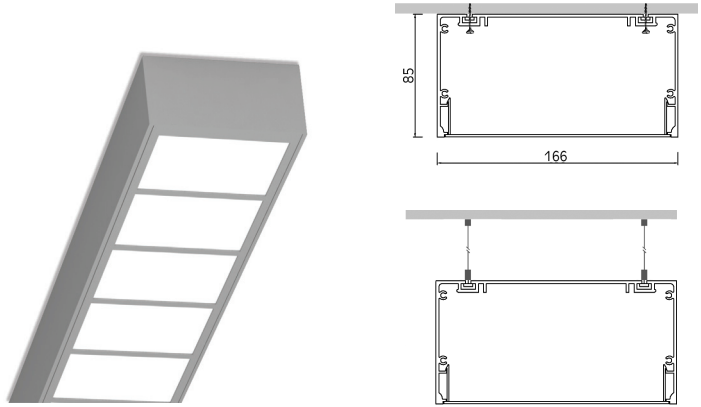

PROFESSIONAL SURFACE & PENDANT LUMINAIRES




- Aluminium body.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
201 Lm/Watt at 4000K 350mA
189 Lm/Watt at 3000K 350mA

Code	Description	L	Kg
91273	Streamlight Plexi Opal Carre Led 16W Neutral	600	3,080
91274	Streamlight Plexi Opal Carre Led 33W Neutral	1160	5,940
91275	Streamlight Plexi Opal Carre Led 49W Neutral	1720	8,810
91276	Streamlight Plexi Opal Carre Led 65W Neutral	2280	11,680
91277	Streamlight Plexi Opal Carre Led 16W Warm	600	3,080
91278	Streamlight Plexi Opal Carre Led 33W Warm	1160	5,940
91279	Streamlight Plexi Opal Carre Led 49W Warm	1720	8,810
91280	Streamlight Plexi Opal Carre Led 65W Warm	2280	11,680

For dimmer version add letter “D” at the end of product code.

STREAMLIGHT PLEXI OPAL DOUBLE LED

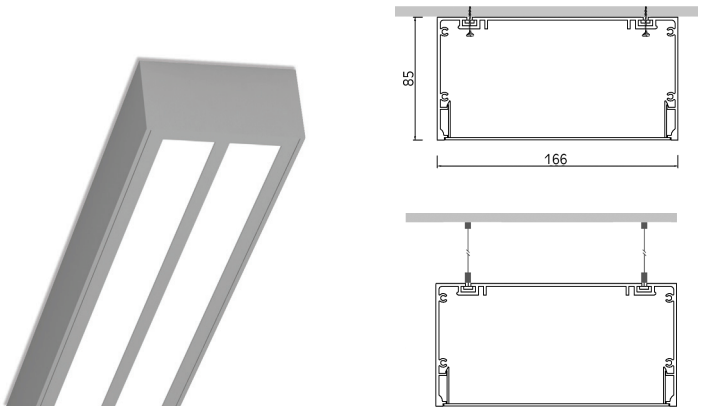


- Aluminium body.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
201 Lm/Watt at 4000K 350mA
189 Lm/Watt at 3000K 350mA

Code	Description	L	Kg
91373	Streamlight Plexi Opal Double Led 16W Neutral	600	3,080
91374	Streamlight Plexi Opal Double Led 33W Neutral	1160	5,940
91375	Streamlight Plexi Opal Double Led 49W Neutral	1720	8,810
91376	Streamlight Plexi Opal Double Led 65W Neutral	2280	11,680
91377	Streamlight Plexi Opal Double Led 16W Warm	600	3,080
91378	Streamlight Plexi Opal Double Led 33W Warm	1160	5,940
91379	Streamlight Plexi Opal Double Led 49W Warm	1720	8,810
91380	Streamlight Plexi Opal Double Led 65W Warm	2280	11,680

For dimmer version add letter “D” at the end of product code.

STREAMLIGHT + Module 60 ARIS LED R111

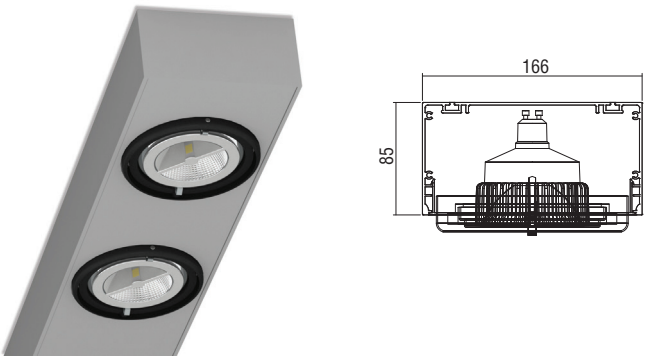


- Outer adjustable ring from die-cast aluminium.
- Connection for 230V/50Hz.

Code	Description	L	Kg
91618	Streamlight Module 60 ARIS Led R111/GU10/230V	350	1,580

STREAMLIGHT

DOUBLE ADJUSTABLE SUSPENSION



PROFESSIONAL SURFACE & PENDANT LUMINAIRES



- Stainless steel cable and regulators.
- **Required:**
2 pieces for up to 3m profile.

Code	Description	L	Kg
900612	Double Suspension Streamlight	1000	0,070
900613	Double Suspension Streamlight	1500	0,110
900614	Double Suspension Streamlight	2000	0,220
900616	Double Suspension Streamlight	3000	0,290

POWER SUPPLY



- Plastic body.
- With transparent cable 3x0,75mm² or 5x0,50mm² for dimmer.

Code	Description	L	Kg
900122	Power Supply 3x0,75mm ² with Rosette Ø75	1000	0,120
900124	Power Supply 3x0,75mm ² with Rosette Ø75	2000	0,240
900126	Power Supply 3x0,75mm ² with Rosette Ø75	3000	0,360
900127	Power Supply 3x0,75mm ² with Rosette Ø75	4000	0,500
900162	Power Supply 5x0,50mm ² with Rosette Ø75	1000	0,120
900164	Power Supply 5x0,50mm ² with Rosette Ø75	2000	0,240
900166	Power Supply 5x0,50mm ² with Rosette Ø75	3000	0,360
900167	Power Supply 5x0,50mm ² with Rosette Ø75	4000	0,500

POWER SUPPLY



- For pendant use.
- Body from aluminium profile.
- With transparent cable 3x0,75mm² or 5x0,50mm² for dimmer.
- Square or round version.

Code	Description	Kg
90042	Power Supply 3x0,75mm ² L 2m Ø80	0,130
90043	Power Supply 3x0,75mm ² L 2m Ø70	0,130
90044	Power Supply 3x0,75mm ² L 2m 80x80	0,210
90045	Power Supply 3x0,75mm ² L 2m 70x70	0,200
90048	Power Supply 5x0,50mm ² L 2m Ø100	0,250
90049	Power Supply 5x0,50mm ² L 2m 100x100	0,300

Colour Codes:

0 Colours **1** White **2** Titan **3** Black **5** matt Alum.