




*Surface wall mounted luminaire with power LED chip.  
It is ideal for a wide range of outdoor applications due to its high protection degree IP65.  
Available with one or two-way light distribution and with different beam angles.*

#### Technical Features

- Aluminium body, painted electrostatically in selected colour.
- Mounting base from die-cast aluminium.
- Tempered protection glass.
- Beam distribution lens.
- Silicone sealant.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).

#### Upon request:

- Available with highest colour rendering index (CRI)





To ensure the degree of protection (sealing), the use of flexible power supply cable type H07RN-F (in appropriate diameter) is required.

# BEAM 3/4 LED

OUTDOOR


## BEAM 3 - ONE WAY

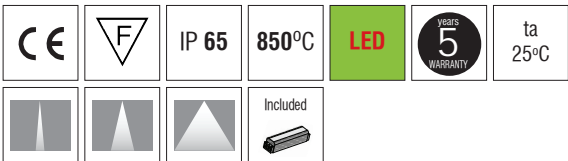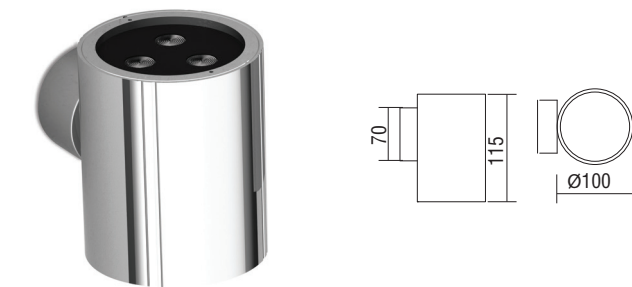


- Beams: Spot, Medium, Wide.
- 3x1W power consumption driven at 350mA.  
3x2W power consumption driven at 500mA.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:  
3x1W: 4000 K: 164 Lm/Watt  
3x1W: 3000 K: 154 Lm/Watt  
3x2W: 4000 K: 113 Lm/Watt  
3x2W: 3000 K: 106 Lm/Watt

Code	Description	Kg
85731	BEAM3 ONE WAY 3 LED x 1W (Integrated Control Gear)	1,600
85732	BEAM3 ONE WAY 3 LED x 2W (Integrated Control Gear)	1,600


SPOT





MEDIUM



WIDE




## BEAM 3 - TWO WAY

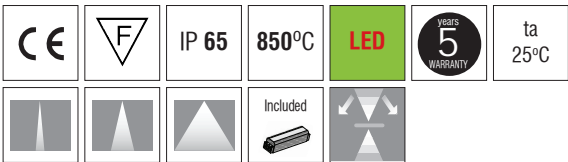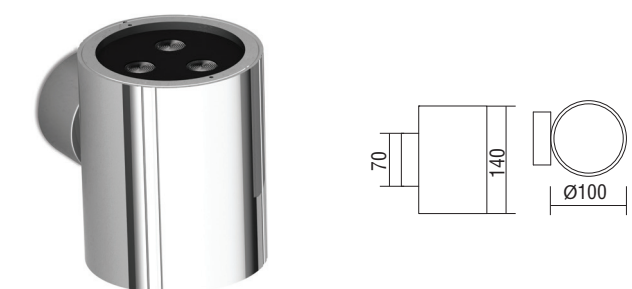


- Beams: Spot, Medium, Wide.
- 6x1W power consumption driven at 350mA.  
6x2W power consumption driven at 500mA.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:  
3+3x1W: 4000 K: 164+164 Lm/Watt  
3+3x1W: 3000 K: 159+159 Lm/Watt  
3+3x2W: 4000 K: 113+113 Lm/Watt  
3+3x2W: 3000 K: 106+106 Lm/Watt

Code	Description	Kg
85736	BEAM3 3+3 LED x 1W (Integrated Control Gear)	2,000
85737	BEAM3 3+3 LED x 2W (Integrated Control Gear)	2,000


SPOT



MEDIUM





WIDE



# BEAM 3/4 LED

OUTDOOR


## BEAM 4 - ONE WAY

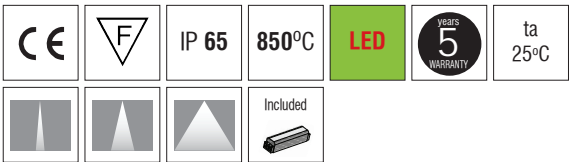


- Beams: Spot, Medium, Wide.
- 3x1W power consumption driven at 350mA.
- 3x2W power consumption driven at 500mA.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:
  - 3x1W: 4000 K: 164 Lm/Watt
  - 3x1W: 3000 K: 154 Lm/Watt
  - 3x2W: 4000 K: 113 Lm/Watt
  - 3x2W: 3000 K: 106 Lm/Watt

Code	Description	Kg
85741	BEAM4 ONE WAY 3 LED x 1W (Integrated Control Gear)	2,500
85742	BEAM4 ONE WAY 3 LED x 2W (Integrated Control Gear)	2,500


### SPOT





### MEDIUM



### WIDE




## BEAM 4 - TWO WAY

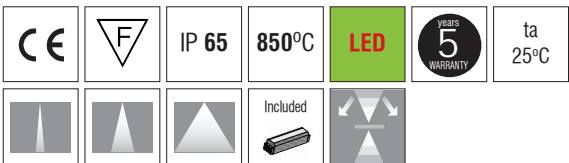


- Beams: Spot, Medium, Wide.
- 6x1W power consumption driven at 350mA.
- 6x2W power consumption driven at 500mA.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:
  - 3+3x1W: 4000 K: 164+164 Lm/Watt
  - 3+3x1W: 3000 K: 159+159 Lm/Watt
  - 3+3x2W: 4000 K: 113+113 Lm/Watt
  - 3+3x2W: 3000 K: 106+106 Lm/Watt

Code	Description	Kg
85746	BEAM4 3+3 LED x 1W (Integrated Control Gear)	2,900
85747	BEAM4 3+3 LED x 2W (Integrated Control Gear)	2,900


### SPOT



### MEDIUM



### WIDE



#### LED COLOUR CODES:

2 Warm 3 Neutral

#### Beams Codes:

10 spot/spot 30 medium/medium 45 wide/wide 90 spot/medium 91 spot/wide 92 medium/wide

#### Colour Codes:

0 Colours 1 White 2 Titan 3 Black 4 Chrome 5 matt Alum.



BEAM 3/4 LED

OUTDOOR

