


PLEXI CENTER

PROFESSIONAL SURFACE & PENDANT LUMINAIRES

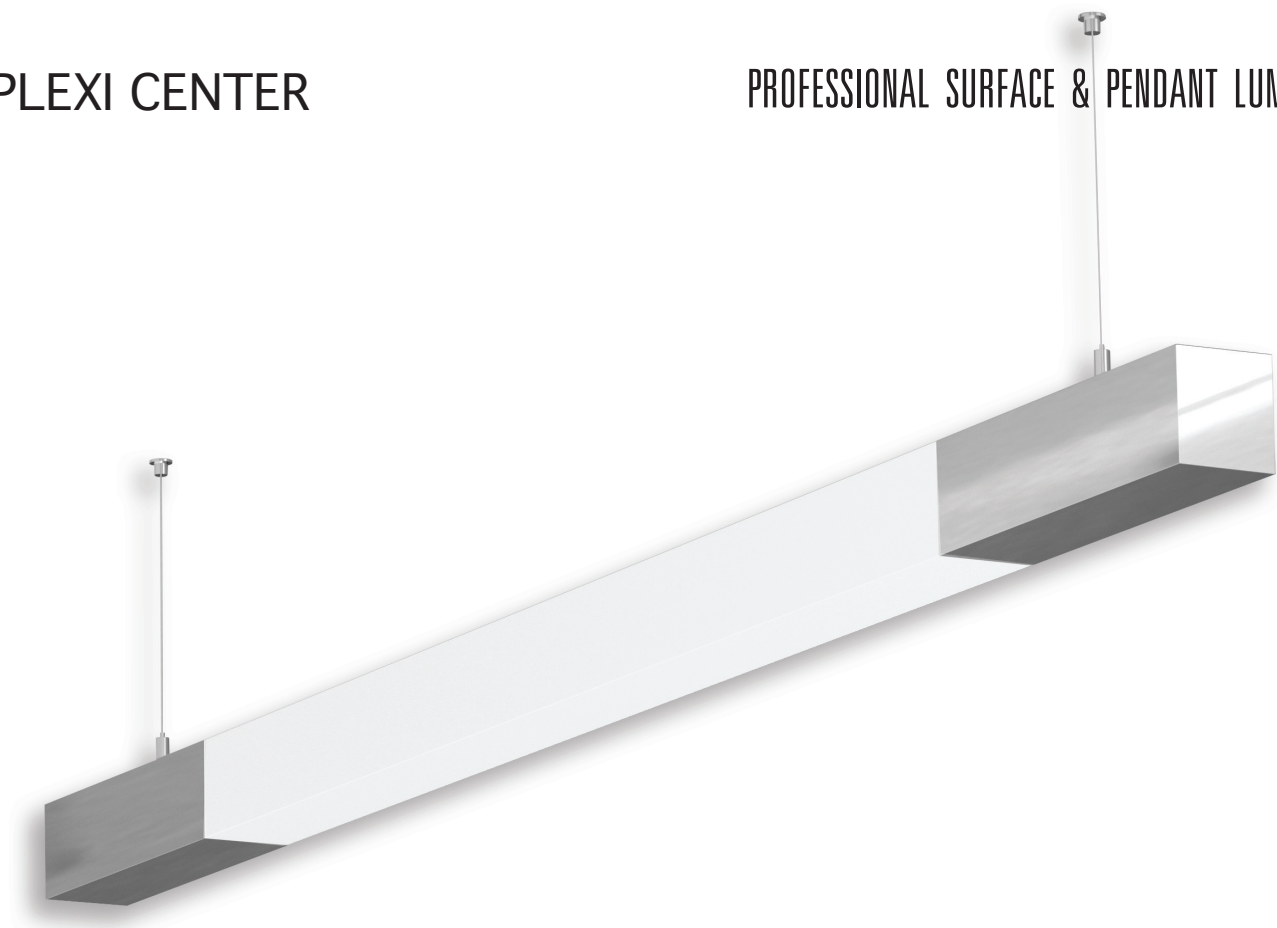

A linear suspended luminaire with impressive design. The luminaire unit is made of an opal diffuser and raises the architectural interest because it appears almost immaterial. It is ideal for applications where diffuse lighting must be combined an elegant shape.

Technical Features

- Body of chrome aluminum profile.
- Opal PMMA diffuser.
- 360° lighting distribution.
- Adjustable suspension consisting of stainless steel cable and regulators.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation on 230V/50Hz.



- Opal PMMA diffuser.
- With transparent cable 3x0,75mm² 1m.
- Rosette Ø80, driver 24V DC and suspensions 1m included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
140Lm/W at 4000 K
133Lm/W at 3000 K

| Code | Description | L |
|-------|------------------------------|------|
| 95005 | Plexi Center Led 22W Warm | 1665 |
| 95006 | Plexi Center Led 22W Neutral | 1665 |
| 95007 | Plexi Center Led 28W Warm | 1965 |
| 95008 | Plexi Center Led 28W Neutral | 1965 |

0

Colours

1

White

2

Titan

3

Black

4

Chrome

