




*Surface wall mounted luminaire with power LED chip.
It is ideal for a wide range of outdoor applications
due to it's high protection degree IP65.
Available with one or two-way light distribution
and with different beam angles.*

Technical Features

- Aluminium body, painted electrostatically in selected colour.
- Mounting base from die-cast aluminium.
- Tempered protection glass.
- Beam distribution lens.
- Silicone sealant.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).

Upon request:

Available with highest colour rendering index (CRI)




To ensure the degree of protection (sealing), the use of flexible power supply cable type H07RN-F (in appropriate diameter) is required.



BEAM 7 LED IP65

OUTDOOR

BEAM 7 - ONE WAY

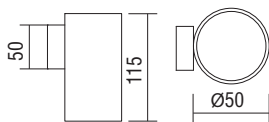


MEDIUM

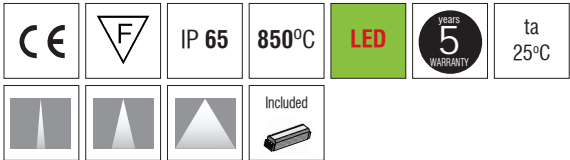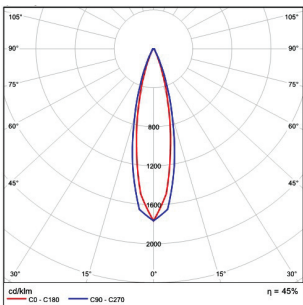



- Beams: Spot, Medium, Wide.
- 1x1W power consumption driven at 350mA.
1x2W power consumption driven at 500mA.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:
1x1W: 4000 K: 164 Lm/Watt
1x1W: 3000 K: 154 Lm/Watt
1x2W: 4000 K: 113 Lm/Watt
1x2W: 3000 K: 106 Lm/Watt

Code	Description	Kg
85770	BEAM7 ONE WAY 1 LED x 1W (Integrated Control Gear)	0,500
85771	BEAM7 ONE WAY 1 LED x 2W (Integrated Control Gear)	0,500

BEAM 7 - TWO WAY

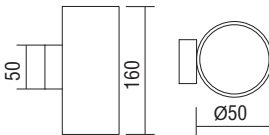

MEDIUM

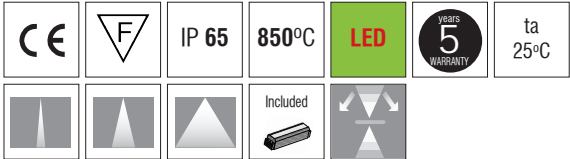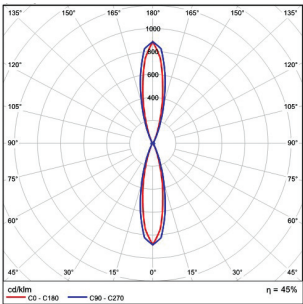

- Beams: Spot, Medium, Wide.
- 2x1W power consumption driven at 350mA.
2x2W power consumption driven at 500mA.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:
1+1x1W: 4000 K: 164+164 Lm/Watt
1+1x1W: 3000 K: 154+154 Lm/Watt
1+1x2W: 4000 K: 113+113 Lm/Watt
1+1x2W: 3000 K: 106+106 Lm/Watt

Code	Description	Kg
85776	BEAM7 TWO WAY 1+1 LED x 1W (Integrated Control Gear)	0,650
85777	BEAM7 TWO WAY 1+1 LED x 2W (Integrated Control Gear)	0,650

LED COLOUR CODES: 2 Warm 3 Neutral	Beams Codes: 10 spot/spot 30 medium/medium 45 wide/wide 90 spot/medium 91 spot/wide 92 medium/wide
Colour Codes: 0 Colours 1 White 2 Titan 3 Black 4 Chrome 5 matt Alum.	

BEAM 7 LED IP65

OUTDOOR



