



*A linear LED luminaire for floor installation,
which illuminates facades uniformly and emphasises
their surfaces.
Although buildings fade over time,
the proper lighting can add value to them,
highlight their uniqueness and make a lasting impression.*

Technical Features

- Aluminium body and frame from stainless steel.
- Passable by persons glass.
- Silicone sealant.
- One cable glands at one end.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Supplied with 3x1mm NEOPRENE 1,5m cable.

Upon request:

- Available with highest colour rendering index (CRI)

SLIM 3 LED - GROUND

OUTDOOR

SLIM 3 - LED GROUND

CE

F

IP 67

850°C

LED

5 YEARS WARRANTY


ta
25°C

included

- Beams: Spot, Medium, Wide, WW.
- Aluminium body.
- Glass cover.
- 39W power consumption driven at 1050mA.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
 - 39W: 6000 K: 135 Lm/Watt
 - 39W: 4000 K: 131 Lm/Watt
 - 39W: 3000 K: 123 Lm/Watt

Code	Description	Kg
813221■ ■ 2	SLIM 3 LED GROUND 39W	8,500

* For dimmer version add letter “D” at the end of product code.

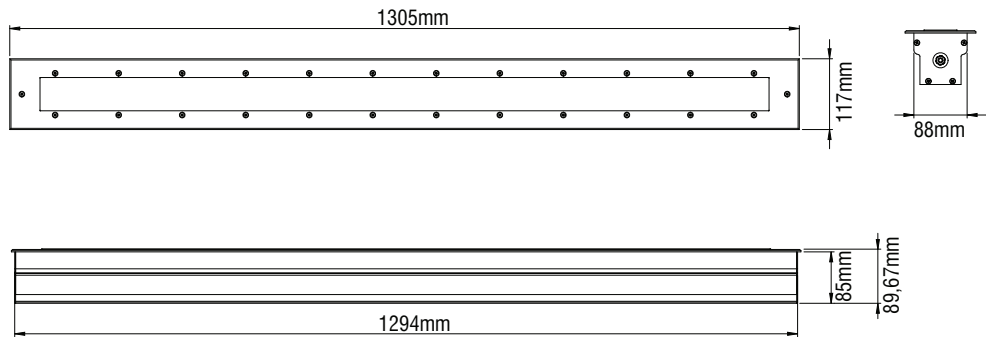

SLIM 3 - LED GROUND ACCESSORIES



Code	Description	Kg
801105	CONNECTOR 4-POLE IP68	0,050

Led Colour:

1

Cool

2

Warm

3

Neutral

Beams Codes:

1

spot

2

medium

3

wide

4

WW



SLIM 3 LED - GROUND

OUTDOOR

