

PICO LED IP54



OUTDOOR




A tiny surface wall mounted luminaire with LED source.
It is ideal for home facade lighting
and it is available with one or two-way light distribution.

Technical Features


- Aluminium body, painted electrostatically in selected colour.
- Die-cast aluminium mounting base.
- Beam distribution glass lens.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).

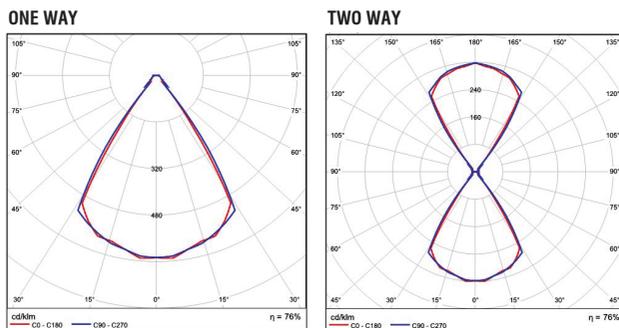

Versions



PICO LED 1W
ONE WAY
120°



PICO LED 1+1W
TWO WAY
120° / 120°

- Beams: Wide.
- Aluminium body.
- Glass lens.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:
164 Lm/Watt at 4000K 350mA
154 Lm/Watt at 3000K 350mA

Code	Description	Kg
85820	PICO ONE WAY 1x1W	0,250
85821	PICO TWO WAY 2x1W	0,300

LED COLOUR CODES:	Beams Codes:	Colour Codes:
2 Warm 3 Neutral	03 Wide	0 Colours 1 White 2 Titan 3 Black 4 Chrome 5 matt Alum.



