


FIVI GROUND with its elegance style and its high IP protection degree (IP65), present itself as an ideal solution for illuminating squares, parks, gardens etc.

Technical Features

- Body from aluminium profile, painted electrostatically in selected colour.
- Diffuser from high efficiency opal satin PMMA or wide beam glass lens for EMBO version.
- Led source with integrated led driver.
- Silicon gaskets.
- Stainless steel screws.
- Accessories for floor or ground installation.
- Operation life: 50,000 hours with efficiency > 70% of the initial luminous flux (L70B50).

FIVI GROUND


FIVI GROUND

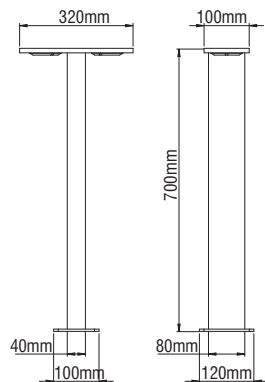

- Aluminium body.
- Beam: Diffuser.
- Connection for operation in 230V/50Hz.
- Dimmer Phase Cut.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
 - 4W: 4000 K: 122 Lm/Watt
 - 4W: 3000 K: 115 Lm/Watt
 - 8W: 4000 K: 116 Lm/Watt
 - 8W: 3000 K: 110 Lm/Watt

Code	Description
84460	Fivi Ground 2x4W Neutral
84461	Fivi Ground 2x4W Warm
84462	Fivi Ground 2x8W Neutral
84463	Fivi Ground 2x8W Warm

FIVI GROUND EMBO

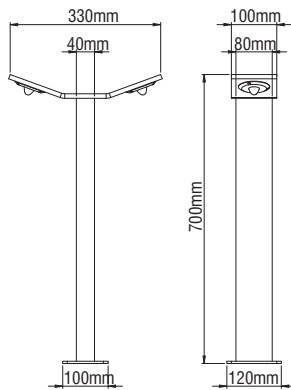

- Aluminium body.
- Beam: Diffuser - glass lens.
- Connection for operation in 230V/50Hz.
- Dimmer Phase Cut.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
 - 4W: 4000 K: 122 Lm/Watt
 - 4W: 3000 K: 115 Lm/Watt
 - 8W: 4000 K: 116 Lm/Watt
 - 8W: 3000 K: 110 Lm/Watt

Code	Description
84464	Fivi Ground Embo 2x4W Neutral
84465	Fivi Ground Embo 2x4W Warm
84466	Fivi Ground Embo 2x8W Neutral
84467	Fivi Ground Embo 2x8W Warm

Colour Codes:

0 Colours 1 White 2 Titan 3 Black