


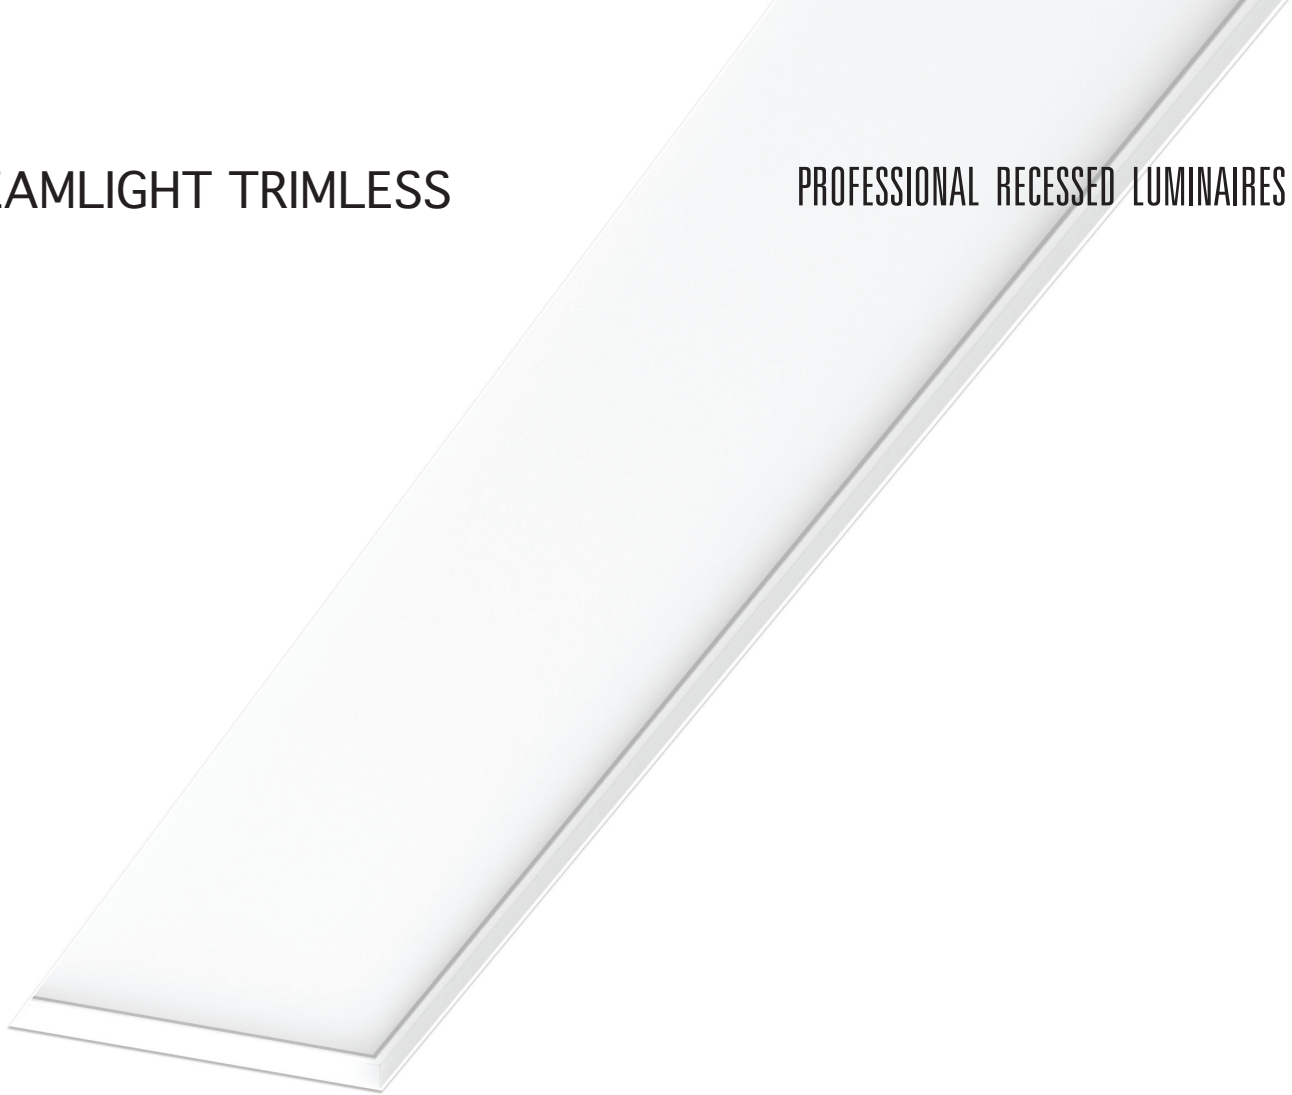

The TRIMLESS version of STREAMLIGHT, with the diffuser position deeper from the ceiling level, gives the impression of an almost immaterial luminaire fully integrated to the ceiling. This architectural advantage, in combination with the perfect lighting conditions without annoying reflections, make the Trimless High System suitable for many different working areas (offices, houses, entrance areas etc).

It escapes also the restrictions of the T16 fluorescent lamps, by using LED lighting points that can have any spacing pitch, and this gives the light line enormous flexibility. The visual benefit: The continuous-row system is illuminated absolutely uniformly from beginning to end, is economically efficient, maintenance free and it has long service-life.

Technical Features


- Housing from aluminium profile, painted electrostatically in selected colour.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- Pure light without IR/UV radiation.
- Efficient thermal management.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation on 230V/50Hz.

Upon request:

- Connection for emergency lighting system, for one or three hours.

STREAMLIGHT TRIMLESS

STREAMLIGHT TRIMLESS LED

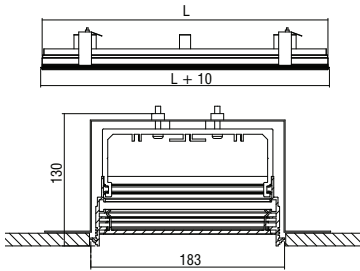

Hole		
16W	189x	626
33W	189x	1186
49W	189x	1746
65W	189x	2306





- Aluminium body.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- Suspension brackets not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
201 Lm/Watt at 4000K 350mA
189 Lm/Watt at 3000K 350mA

Code	Description	L	Kg
94473	Streamlight Trimless Led 16W Neutral	620	2,170
94474	Streamlight Trimless Led 33W Neutral	1180	4,130
94475	Streamlight Trimless Led 49W Neutral	1740	6,090
94476	Streamlight Trimless Led 65W Neutral	2300	8,050
94477	Streamlight Trimless Led 16W Warm	620	2,170
94478	Streamlight Trimless Led 33W Warm	1180	4,130
94479	Streamlight Trimless Led 49W Warm	1740	6,090
94480	Streamlight Trimless Led 65W Warm	2300	8,050

For dimmer version add letter “D” at the end of product code.

STREAMLIGHT TRIMLESS ANAGLYPH LED

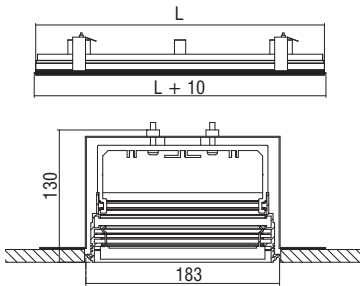

Hole		
16W	189x	626
33W	189x	1186
49W	189x	1746
65W	189x	2306



- Aluminium body.
- Diffuser in opal of 10mm PMMA.
- Flow recuperator in white colour.
- Suspension brackets not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
201 Lm/Watt at 4000K 350mA
189 Lm/Watt at 3000K 350mA

Code	Description	L	Kg
94573	Streamlight Trimless Anaglyph Led 16W Neutral	620	3,140
94574	Streamlight Trimless Anaglyph Led 33W Neutral	1180	5,970
94575	Streamlight Trimless Anaglyph Led 49W Neutral	1740	8,810
94576	Streamlight Trimless Anaglyph Led 65W Neutral	2300	11,640
94577	Streamlight Trimless Anaglyph Led 16W Warm	620	3,140
94578	Streamlight Trimless Anaglyph Led 33W Warm	1180	5,970
94579	Streamlight Trimless Anaglyph Led 49W Warm	1740	8,810
94580	Streamlight Trimless Anaglyph Led 65W Warm	2300	11,640


For dimmer version add letter “D” at the end of product code.

Colour Codes:

0 Colours 1 White 2 Titan 3 Black

STREAMLIGHT TRIMLESS

STREAMLIGHT TRIMLESS PLEXI OPAL CARRE LED

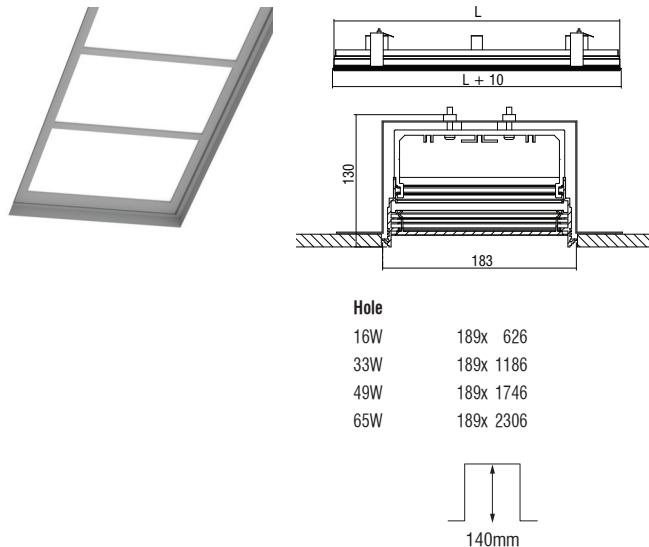

Hole	
16W	189x 626
33W	189x 1186
49W	189x 1746
65W	189x 2306




- Aluminium body.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- Suspension brackets not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
201 Lm/Watt at 4000K 350mA
189 Lm/Watt at 3000K 350mA

Code	Description	L	Kg
94773	Streamlight Trimless Plexi Opal Carre Led 16W Neutral	620	3,200
94774	Streamlight Trimless Plexi Opal Carre Led 33W Neutral	1180	6,090
94775	Streamlight Trimless Plexi Opal Carre Led 49W Neutral	1740	8,980
94776	Streamlight Trimless Plexi Opal Carre Led 65W Neutral	2300	11,870
94777	Streamlight Trimless Plexi Opal Carre Led 16W Warm	620	3,200
94778	Streamlight Trimless Plexi Opal Carre Led 33W Warm	1180	6,090
94779	Streamlight Trimless Plexi Opal Carre Led 49W Warm	1740	8,980
94780	Streamlight Trimless Plexi Opal Carre Led 65W Warm	2300	11,870

For dimmer version add letter “D” at the end of product code.

STREAMLIGHT TRIMLESS PLEXI OPAL DOUBLE LED

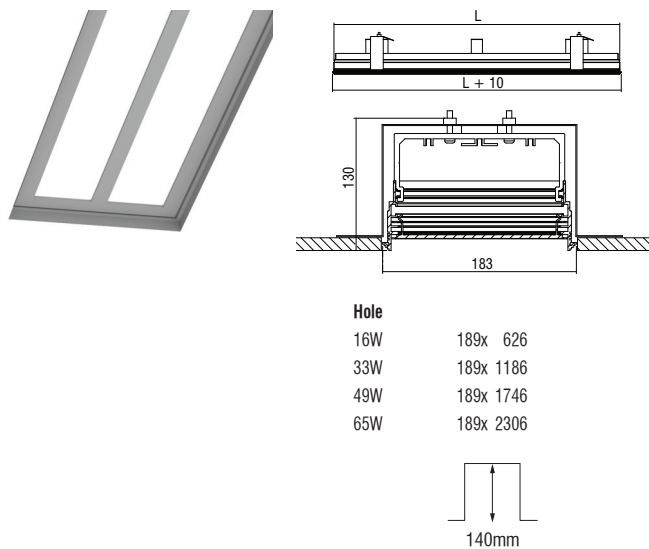

Hole	
16W	189x 626
33W	189x 1186
49W	189x 1746
65W	189x 2306



- Aluminium body.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- Suspension brackets not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
201 Lm/Watt at 4000K 350mA
189 Lm/Watt at 3000K 350mA

Code	Description	L	Kg
94873	Streamlight Trimless Plexi Opal Double Led 16W Neutral	620	2,170
94874	Streamlight Trimless Plexi Opal Double Led 33W Neutral	1180	4,130
94875	Streamlight Trimless Plexi Opal Double Led 49W Neutral	1740	6,090
94876	Streamlight Trimless Plexi Opal Double Led 65W Neutral	2300	8,050
94877	Streamlight Trimless Plexi Opal Double Led 16W Warm	620	2,170
94878	Streamlight Trimless Plexi Opal Double Led 33W Warm	1180	4,130
94879	Streamlight Trimless Plexi Opal Double Led 49W Warm	1740	6,090
94880	Streamlight Trimless Plexi Opal Double Led 65W Warm	2300	8,050

For dimmer version add letter “D” at the end of product code.


Colour Codes:

0 Colours 1 White 2 Titan 3 Black

STREAMLIGHT TRIMLESS

PROFESSIONAL RECESSED LUMINAIRES



STREAMLIGHT TRIMLESS + Module 60 ARIS LED R111

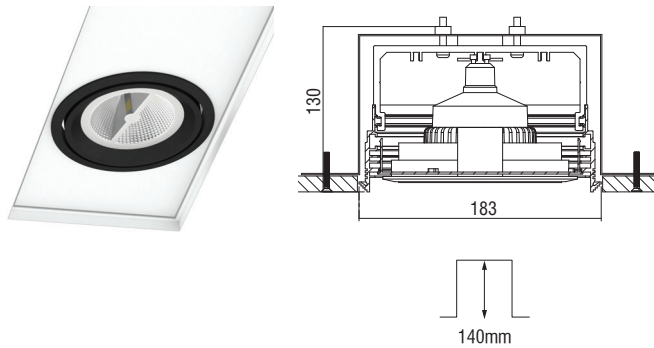

- Version for LED R111/GU10.
- Outer adjustable ring from die-cast aluminium.
- Inner ring for easy lamp replacement.
- Connection for 230V/50Hz.

Code	Description	L	Kg
95318	Streamlight Trimless Module 60 ARIS LED R111/GU10/230V	350	1,270


STREAMLIGHT TRIMLESS + Module 60 DIAS LED

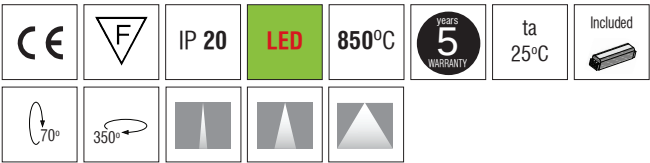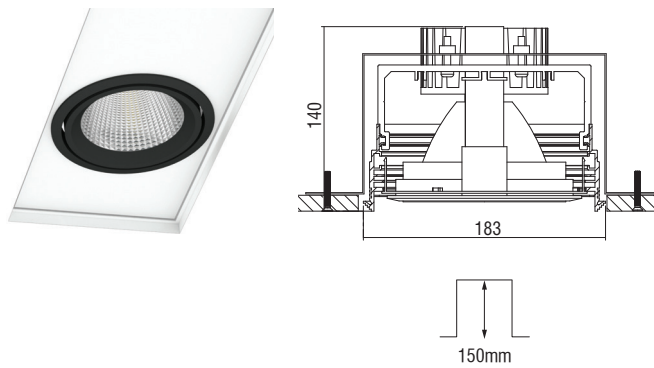


- Reflectors: Spot, Medium, Wide.
- Outer adjustable ring from die-cast aluminium.
- 19W power consumption driven at 500mA.
- 26W power consumption driven at 700mA.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
 - 19W: 4000 K: 155 Lm/Watt
 - 19W: 3000 K: 149 Lm/Watt
 - 26W: 4000 K: 154 Lm/Watt
 - 26W: 3000 K: 148 Lm/Watt

Code	Description	L	Kg
95331	Streamlight Trimless Module 60 DIAS LED CHIP 19W	350	1,270
95332	Streamlight Trimless Module 60 DIAS LED CHIP 26W	350	1,270


DIAS SPOT



DIAS MEDIUM





DIAS WIDE



STREAMLIGHT TRIMLESS

PROFESSIONAL RECESSED LUMINAIRES


STREAMLIGHT TRIMLESS + Module 60 KRONOS LED

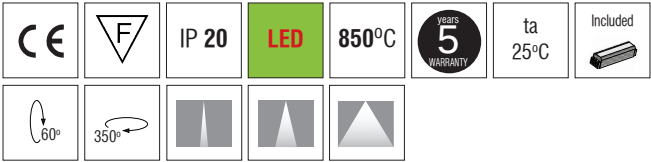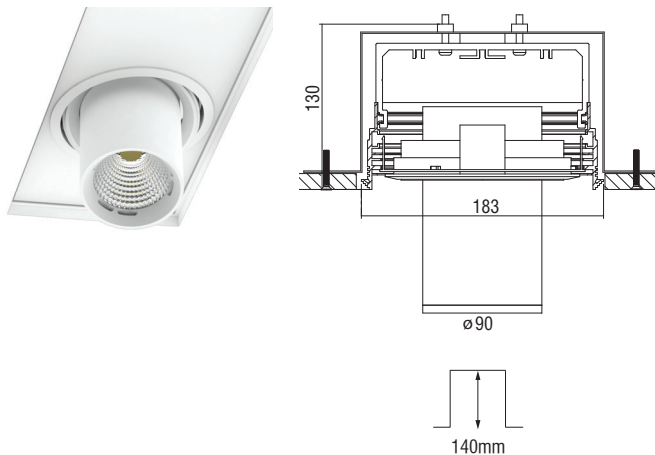


- Reflectors: Spot, Medium, Wide.
- Outer adjustable ring from die-cast aluminium.
- Die-cast aluminium spot inside.
- 19W power consumption driven at 500mA.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
19W: 4000 K: 155 Lm/Watt
19W: 3000 K: 149 Lm/Watt

Code	Description	L	Kg
95339	Streamlight Trimless Module 60 KRONOS LED CHIP 19W	350	1,170


KRONOS SPOT





KRONOS MEDIUM



KRONOS WIDE




STREAMLIGHT TRIMLESS + Module 40 HERCULES LED REFLECTOR

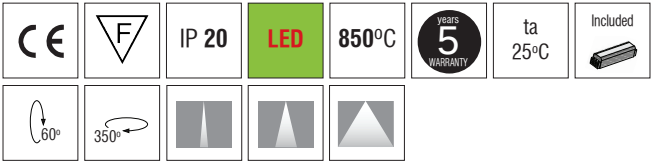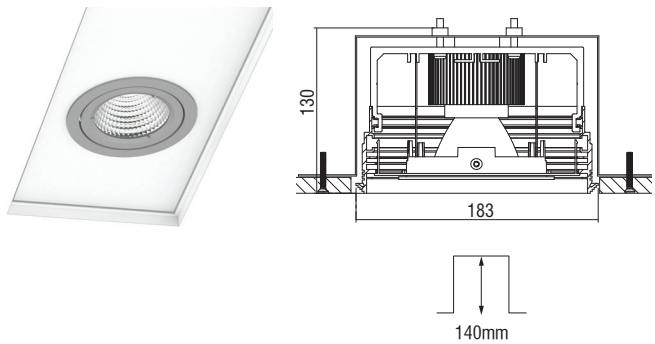


- Reflectors: Spot, Medium, Wide.
- 12W power consumption driven at 350mA.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
12W: 4000 K: 174 Lm/Watt
12W: 3000 K: 170 Lm/Watt

Code	Description	L	Kg
95353	Streamlight Trimless Module 40 HERCULES LED REFLECTOR 12W	350	1,270
95354	Streamlight Trimless 2x Module 40 HERCULES LED REFLECTOR 12W	550	1,990


HERCULES SPOT



HERCULES MEDIUM




HERCULES WIDE



STREAMLIGHT TRIMLESS

PROFESSIONAL RECESSED LUMINAIRES

STREAMLIGHT TRIMLESS + Module 40 IASON LED REFLECTOR HO

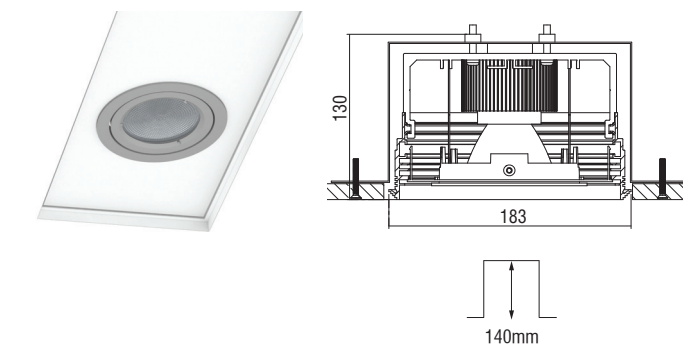

CE

F

IP 20

LED

850°C

5 YEARS WARRANTY

ta 25°C

Included


60°

350°

- Reflectors: Spot, Medium, Wide.
- 12W power consumption driven at 350mA.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
12W: 4000 K: 174 Lm/Watt
12W: 3000 K: 170 Lm/Watt

Code	Description	L	Kg
95355	Streamlight Trimless Module 40 IASON LED REFLECTOR HO 12W	350	1,270
95356	Streamlight Trimless 2x Module 40 IASON LED REFLECTOR HO 12W	550	1,990

STREAMLIGHT TRIMLESS BRACKET

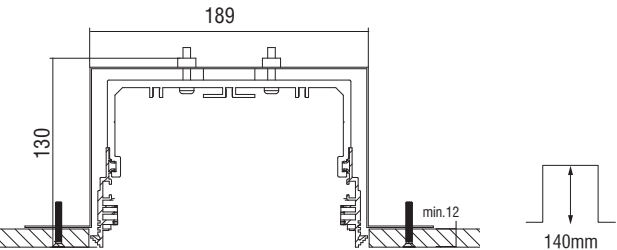

- CE
- Metal suspension bracket.
 - Required 1pc per 0,5m profile length.

Code	Description	Kg
900810	Suspension Bracket Streamlight Trimless	0,270

LED COLOUR CODES:

2 Warm 3 Neutral

BEAM CODES:

01 spot 02 medium 03 wide

Colour Codes:

0 Colours 1 White 2 Titan 3 Black

