

The CLUB luminaires highlight impressively premises, such as shopping malls, stores, hotels, exhibition halls, museums etc. They are compact and efficient and they have excellent colour quality and high-precision light distribution.

MINI CLUB LED - CLUB 1 LED - CLUB 2 LED - Complete lighting range

The LED chip is available in two colour temperatures, warm and neutral. The luminaire is ON/OFF or dimmable and it can be mounted on track or on ceiling.

Technical Features

- Aluminium body, painted electrostatically in selected colour.
- High pure aluminium reflectors in Spot, Medium, Wide versions.
- With Universal adapter for mounting on 3-phase track.
- Connection for operation on 230V-50/60Hz with electronic ballast.

Upon request

- Connection for operation with electronic dimmable ballast.

For LED Version

- Pure light without IR/UV radiation.
- Efficient thermal management.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation on 230V/50Hz.


Upon request:

Available with highest colour rendering index (CRI)

/ 380 / www.petridis-lighting.gr


CLUB 60 - GU10






CLUB 60 L - GU10





CLUB 60 L H - GU10





CLUB 60 S - GU10







- Version for LED PAR16/GU10.
- Aluminium body.
- With Universal adapter for mounting on 3-phase track.
- Version with honeycomb for low glare.

Code	Description	Kg
89240≡	CLUB 60 Track 1x max. 50W / GU10	0,300
89244■	CLUB 60 L Track 1x max. 50W / GU10	0,350
89245■	CLUB 60 L H Track 1x max. 50W / GU10	0,350




- Version for LED PAR16/GU10.
- Aluminium body.
- With Universal adapter for mounting on 3-phase track.

Code	Description	Kg	
89241■	CLUB 60 S Track 1x max. 50W / GU10	30cm	0,400
89242	CLUB 60 S Track 1x max. 50W / GU10	60cm	0,430
89243	CLUB 60 S Track 1x max. 50W / GU10	100cm	0,460


www.petridis-lighting.gr / 381 /


CLUB 1 - LED




CLUB 1 LEVEL - LED











- Version for LED CHIP.
- Aluminium body.
- High efficiency reflectors in Spot, Medium, Wide versions.
- With Universal adapter for mounting on 3-phase track.
- CRI: min. 80 / SDCM: 3
- Luminous efficacy:

19W: 4000 K: 156 Lm/Watt 19W: 3000 K: 150 Lm/Watt 26W: 4000 K: 154 Lm/Watt 26W: 3000 K: 148 Lm/Watt

Code	Description	Kg
89330	CLUB1 19W Track	1,250
89331■■■	CLUB1 26W Track	1,250

For dimmer version add letter "D" at the end of product code.




- Version for LED CHIP.
- Aluminium body.
- High efficiency reflectors in Spot, Medium, Wide versions.
- With Universal adapter for mounting on 3-phase track.
- CRI: min. 80 / SDCM: 3
- Luminous efficacy:

19W: 4000 K: 156 Lm/Watt 19W: 3000 K: 150 Lm/Watt 26W: 4000 K: 154 Lm/Watt 26W: 3000 K: 148 Lm/Watt


Code	Description	Kg
89680	CLUB1 LEVEL 19W Track	1,250
89681	CLUB1 LEVEL 26W Track	1,250

For dimmer version add letter "D" at the end of product code.




/ 382 / www.petridis-lighting.gr

CLUB 1 - LED SUN

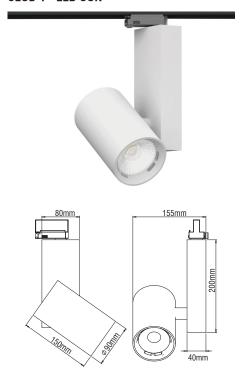

CLUB 1 LEVEL - LED SUN







- Version for LED CHIP.
- Aluminium body.
- High efficiency LED lens in Spot, Medium, Wide versions.
- With Universal adapter for mounting on 3-phase track.
- CRI: min. 80 / SDCM: 3
- Luminous efficacy:

19W: 4000 K: 156 Lm/Watt 19W: 3000 K: 150 Lm/Watt 26W: 4000 K: 154 Lm/Watt 3000 K: 148 Lm/Watt 26W:

Code	Description	Kg
89332	CLUB1 Sun 19W Track	1,250
89333	CLUB1 Sun 26W Track	1,250

For dimmer version add letter "D" at the end of product code.




- Version for LED CHIP.
- Aluminium body.
- High efficiency LED lens in Spot, Medium, Wide versions.
- With Universal adapter for mounting on 3-phase track.
- CRI: min. 80 / SDCM: 3
- Luminous efficacy:

19W: 4000 K: 156 Lm/Watt 3000 K: 150 Lm/Watt 19W: 26W: 4000 K: 154 Lm/Watt 26W: 3000 K: 148 Lm/Watt


Code	Description	Kg
89700■ ■ ■	CLUB1 LEVEL Sun 19W Track	1,250
89701■■■	CLUB1 LEVEL Sun 26W Track	1,250


For dimmer version add letter "D" at the end of product code.

CLUB 1 LED SUN/CLUB 1 LEVEL LED SUN - SPOT



CLUB 1 LED SUN/CLUB 1 LEVEL LED SUN - MEDIUM CLUB 1 LED SUN/CLUB 1 LEVEL LED SUN - WIDE






www.petridis-lighting.gr / 383 /

CLUB 1 SHORT - LED


























- Version for LED CHIP.
- Aluminium body.
- High efficiency reflectors in Spot, Medium, Wide versions.
- With Universal adapter for mounting on 3-phase track.
- Dimmer Phase Cut.
- CRI: min. 80 / SDCM: 3
- Luminous efficacy:

4000 K: 95 Lm/Watt 10W: 3000 K: 90 Lm/Watt 10W: 15W: 4000 K: 95 Lm/Watt 15W: 3000 K: 90 Lm/Watt 20W: 4000 K: 95 Lm/Watt 20W: 3000 K: 90 Lm/Watt

Code	Description	Kg
89960■ ■ ■	CLUB1 SHORT 10W/230V Track	1,000
89970■■■	CLUB1 SHORT 15W/230V Track	1,000
89980	CLUB1 SHORT 20W/230V Track	1,000

CLUB 1 SHORT2 - LED




























- Version for LED CHIP.
- Aluminium body.
- High efficiency reflectors in Spot, Medium, Wide versions.
- With Universal adapter for mounting on 3-phase track.
- Dimmer Phase Cut.
- CRI: min. 80 / SDCM: 3
- Luminous efficacy:

10W: 4000 K: 95 Lm/Watt 10W: 3000 K: 90 Lm/Watt 4000 K: 95 Lm/Watt 15W: 15W: 3000 K: 90 Lm/Watt 20W: 4000 K: 95 Lm/Watt 3000 K: 90 Lm/Watt 20W:

Code	Description	Kg
89150	CLUB1 SHORT2 10W/230V Track	1,000
89160	CLUB1 SHORT2 15W/230V Track	1,000
89170	CLUB1 SHORT2 20W/230V Track	1,000

CLUB 1 SHORT/CLUB 1 SHORT 2 - SPOT




CLUB 1 SHORT/CLUB 1 SHORT 2 - MEDIUM

CLUB 1 SHORT/CLUB 1 SHORT 2 - WIDE

/ 384 / www.petridis-lighting.gr

CLUB 1 WW - LED







- Version for LED CHIP.
- Aluminium body.
- Reflector in Wall Washer version.
- With Universal adapter for mounting on 3-phase track.
- CRI: min. 80 / SDCM: 3
- Luminous efficacy:

19W: 4000 K: 156 Lm/Watt 19W: 3000 K: 150 Lm/Watt 26W: 4000 K: 154 Lm/Watt 26W: 3000 K: 148 Lm/Watt

Code	Description	Kg
89260■04■	CLUB1 WW 19W	1,250
89261 ■ 04 ■	CLUB1 WW 26W	1,300
89262■04■	CLUB1 Level WW 19W	1,250
89263■04■	CLUB1 Level WW 26W	1,300


For dimmer version add letter "D" at the end of product code.



www.petridis-lighting.gr / 385 /

HONEYCOMB LOUVRE Ø90










- Aluminium external ring.
- Honeycomb louvre.

Code	Description
80913■	Honeycomb Louvre Ø90

SPOT








OVAL OUTLINE LENS Ø90










- Aluminium external ring.Glass oval outline lens.

Code	Description
80912	Oval Outline lens Ø90








SOFT OUTLINE LENS Ø90










- Aluminium external ring.
- Glass soft outline lens.

Code	Description
80911■	Soft Outline Lens Ø90








ANTI-GLARE BLADES Ø90








- Aluminium external ring.
- Anti-glare blades.


Code	Description	
80914■	Anti-glare Blades Ø90	

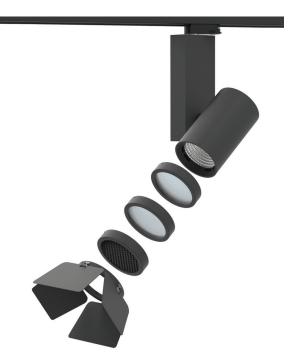

www.petridis-lighting.gr / 387 /

CLUB 2 - LED







- Version for LED CHIP.
- Aluminium body.
- High efficiency reflectors in Spot, Medium, Wide versions.
- Passive cooling.
- With Universal adapter for mounting on 3-phase track.
- 40W power consumption driven at 1050mA.
- CRI: min. 80 / SDCM: 3
- Luminous efficacy:


40W: 4000 K: 141 Lm/Watt 40W: 3000 K: 136 Lm/Watt

Code	Description	Kg
89350	CLUB2 40W Track	1,300

For dimmer version add letter "D" at the end of product code.

CLUB 2 LEVEL - LED



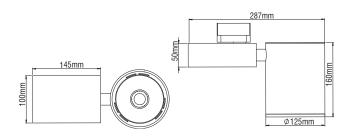




- Version for LED CHIP.
- Aluminium body.
- High efficiency reflectors in Spot, Medium, Wide versions.
- Passive cooling.
- With Universal adapter for mounting on 3-phase track.
- 40W power consumption driven at 1050mA.
- CRI: min. 80 / SDCM: 3
- Luminous efficacy:

40W: 4000 K: 141 Lm/Watt 40W: 3000 K: 136 Lm/Watt

Code	Description	Kg
89890	CLUB2 LEVEL 40W Track	1,300

For dimmer version add letter " $\boldsymbol{\mathsf{D}}$ " at the end of product code.


/ 388 / www.petridis-lighting.gr

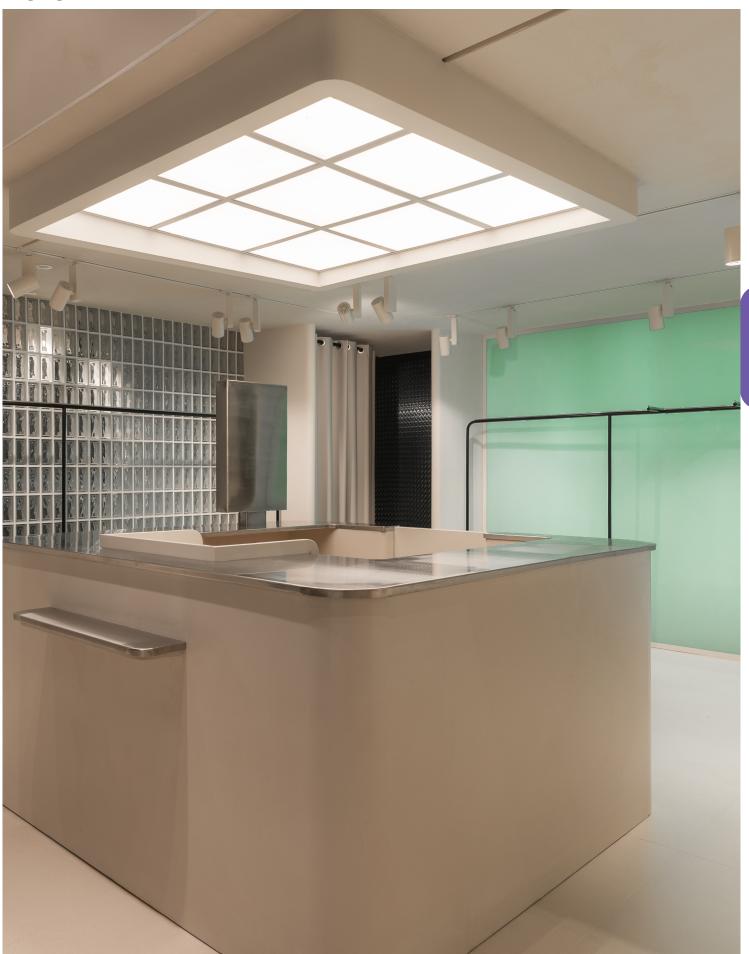

www.petridis-lighting.gr / 389 /

CLUB 2 SHORT - LED







- Version for LED CHIP.
- Aluminium body.
- High efficiency reflectors in Spot, Medium, Wide versions.
- Passive cooling.
- With Universal adapter for mounting on 3-phase track.
- Dimmer Phase Cut.
- CRI: min. 80 / SDCM: 3
- Luminous efficacy:

89856


4000 K: 95 Lm/Watt 20W: 3000 K: 90 Lm/Watt 20W:

Kg 1,300 Code Description

CLUB2 SHORT 20W/230V Track

CLUB 2 SHORT2 - LED








- Version for LED CHIP.
- Aluminium body.
- High efficiency reflectors in Spot, Medium, Wide versions.
- Passive cooling.
- With Universal adapter for mounting on 3-phase track.
- Dimmer Phase Cut.
- CRI: min. 80 / SDCM: 3
- Luminous efficacy:


20W: 4000 K: 95 Lm/Watt 20W: 3000 K: 90 Lm/Watt

Code	Description	Kg
89120	CLUB2 SHORT2 20W/230V T	rack 1 300


CLUB 2/ CLUB 2 LEVEL/CLUB 2 SHORT /CLUB 2 SHORT 2 - SPOT



CLUB 2/ CLUB 2 LEVEL/CLUB 2 SHORT /CLUB 2 SHORT 2 - MEDIUM



CLUB 2/ CLUB 2 LEVEL/CLUB 2 SHORT /CLUB 2 SHORT 2 - WIDE









1 White 2 Titan


3 Black

4 Chrome

5 matt Alum.

HONEYCOMB LOUVRE Ø125










- Aluminium external ring. Honeycomb louvre.

Code	Description
80923■	Honeycomb Louvre Ø125








OVAL OUTLINE LENS Ø125










- Aluminium external ring.
- Glass oval outline lens.

Code [Description
80922■ (Oval Outline lens ∅125








www.petridis-lighting.gr / 391 /

SOFT OUTLINE LENS Ø125












- Aluminium external ring.Glass soft outline lens.

Code	Description	
80921■	Soft Outline Lens Ø125	

SPOT








ANTI-GLARE BLADES ∅125









- Aluminium external ring.Anti-glare blades.

DescriptionAnti-glare Blades Ø125 Code 80924≣





www.petridis-lighting.gr / 393 /