




EKTOR with its elegance style and its high IP protection degree (IP65), present itself as an ideal solution for illuminating squares, parks, gardens etc.

Technical Features


- Body from aluminium profile, painted electrostatically in selected colour.
- Transparent diffuser from PMMA plastic.
- Stainless steel screws.
- Accessories for floor or ground installation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Supplied with 2x0,75mm NEOPRENE 1m cable.



EKTOR

OUTDOOR


EKTOR 1



- Aluminium body.
- 24V DC.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
4W: 4000 K: 96 Lm/Watt
4W: 3000 K: 92 Lm/Watt

Code	Description	Kg
84480	EKTOR 1 4W Warm	1,000
84481	EKTOR 1 4W Neutral	1,000


EKTOR 2



- Aluminium body.
- 24V DC.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
6W: 4000 K: 96 Lm/Watt
6W: 3000 K: 92 Lm/Watt

Code	Description	Kg
84482	EKTOR 2 6W Warm	1,300
84483	EKTOR 2 6W Neutral	1,300

EKTOR 3

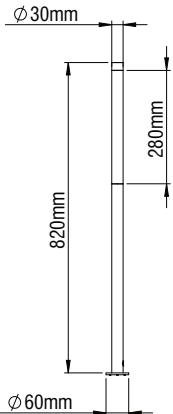

- Aluminium body.
- 24V DC.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
6W: 4000 K: 96 Lm/Watt
6W: 3000 K: 92 Lm/Watt

Code	Description	Kg
84484	EKTOR 3 6W Warm	1,500
84485	EKTOR 3 6W Neutral	1,500

Colour Codes:			
0	Colours	1	White
2	Titan	3	Black





DRIVERS 24V DC

CODE	DESCRIPTION	IP	DIMENSIONS mm
800071	DRIVER LED 24V DC/30W	20	153x41x32
800099	DRIVER LED 24V DC/50W	20	99x82x30
800097	DRIVER LED 24V DC/60W	20	180x52x30
800105	DRIVER LED 24V DC/60W	20	225x43x29,8
800098	DRIVER LED 24V DC/100W	20	129x97x30
800106	DRIVER LED 24V DC/100W	20	295x43x29,8
800058	DRIVER LED 24V DC/150W	20	159x97x30
800112	DRIVER LED 24V DC/200W	20	215x115x30
800088	DRIVER LED 24V DC/320W	20	215x115x30
800089	DRIVER LED 24V DC/60W	67	162,5x42,5x32
800092	DRIVER LED 24V DC/150W	67	191x63x37,5


DIMMER DRIVERS 24V DC

CODE	DESCRIPTION	IP	DIMENSIONS mm	DIMMER
800139	DRIVER LED 24V DC/35W	20	195x43x30,2	DALI / PUSH BUTTON
800018	DRIVER LED 24V DC/60W	20	225x43x30,2	DALI / PUSH BUTTON
800017	DRIVER LED 24V DC/100W	20	295x43x30	DALI / PUSH BUTTON
800108	DRIVER LED 24V DC/150W	20	325x43x30,2	DALI / PUSH BUTTON
800101	DRIVER LED 24V DC/60W	20	195x48x30	PHASE CUT / 1-10V DC
800102	DRIVER LED 24V DC/100W	20	232x49x29	PHASE CUT / 1-10V DC
800093	DRIVER LED 24V DC/150W	65	228x68x38,8	1-10V DC
800095	DRIVER LED 24V DC/240W	65	244,2x68x38,8	1-10V DC
800094	DRIVER LED 24V DC/320W	65	252x90x43,8	1-10V DC

EKTOR ACCESSORIES



Code	Description	Kg
80463	Base EKTOR 1 (for floor installation)	0,050
80465	Base EKTOR 2 & 3 (for floor installation)	0,050
804640	Picket EKTOR 1 (for ground installation)	0,100
804660	Picket EKTOR 2 & 3 (for ground installation)	0,100



Code	Description	Kg
801105	CONNECTOR 4-POLE IP68	0,050

EKTOR

OUTDOOR

