



Technical Features


- Single-piece housing in **pressed steel**, powder-coated in white epoxy-polyester (for 75/76 series) or single-piece housing in **pressed aluminium**, powder-coated in white epoxy-polyester (for 90, 91 series) or single piece pressed stainless steel housing (for 92, 93 series).
- Anti-aging injected sealing gasket.
- Clips in galvanized steel for diffuser mounting.
- Gear-tray reflector unit in hot-galvanized steel, painted in white polyester, fixed to the housing with rotary Ribloc mechanisms from galvanized steel.
- Connection for operation on 230V-50Hz.
- $Ra \geq 80$, 3000K, 4000K.
- Led life time 50000h (L80B10).
- Driver life time 100000h.
- Colour tolerance: 3 MacAdam steps.

Upon request

- Connection for operation on 230V-50/60Hz with dimmer dali or 1-10VDC ballast.
- Connection for emergency lighting system, for one or three hours.

ETA

ETA 75

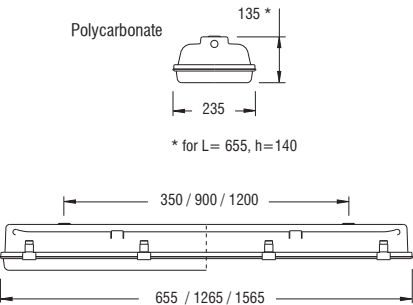


- Diffuser in transparent self-extinguishing V2 polycarbonate, UV stabilised, injection moulded, with smooth outer surface and differentiated prismatic inner surface.

Code	Description	L
531873	ETA 752 Led 2x12W 3900Lm Neutral	655
531893	ETA 752 Led 2x24W 7800Lm Neutral	1265
531913	ETA 752 Led 2x30W 9740Lm Neutral	1565
531603	ETA 752 Led 2x37W 11460Lm Neutral	1565
531883	ETA 752 Led 2x12W 3620Lm Warm	655
531903	ETA 752 Led 2x24W 7240Lm Warm	1265
531923	ETA 752 Led 2x30W 9060Lm Warm	1565
531613	ETA 752 Led 2x37W 10700Lm Warm	1565

For dimmer version add letter “D” at the end of product code.

ETA 76

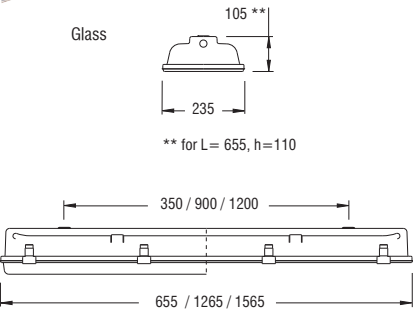

- Transparent tempered glass, sealing gasket, single-piece perimetrical frame in galvanized steel, hinged opening by means of galvanized steel clips.

Code	Description	L
532873	ETA 762 Led 2x12W 3900Lm Neutral	655
532893	ETA 762 Led 2x24W 7800Lm Neutral	1265
532913	ETA 762 Led 2x30W 9740Lm Neutral	1565
532603	ETA 762 Led 2x37W 11460Lm Neutral	1565
532883	ETA 762 Led 2x12W 3620Lm Warm	655
532903	ETA 762 Led 2x24W 7240Lm Warm	1265
532923	ETA 762 Led 2x30W 9060Lm Warm	1565
532613	ETA 762 Led 2x37W 10700Lm Warm	1565

For dimmer version add letter “D” at the end of product code.


ETA

LUMINAIRES WITH EXTRA PROTECTION




ETA

ETA 90

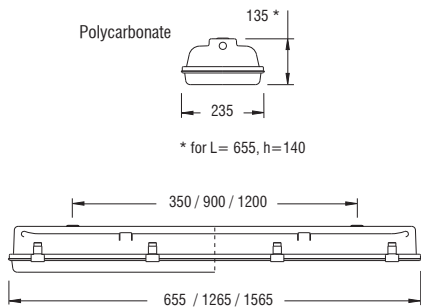

ETA 91

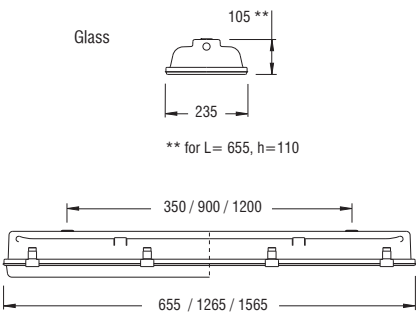

LUMINAIRES WITH EXTRA PROTECTION



- Diffuser in transparent self-extinguishing V2 polycarbonate, UV stabilised, injection moulded, with smooth outer surface and differentiated prismatic inner surface.

Code	Description	L
521873	ETA 902 Led 2x12W 3900Lm Neutral	655
521893	ETA 902 Led 2x24W 7800Lm Neutral	1265
521913	ETA 902 Led 2x30W 9740Lm Neutral	1565
521603	ETA 902 Led 2x37W 11460Lm Neutral	1565
521883	ETA 902 Led 2x12W 3620Lm Warm	655
521903	ETA 902 Led 2x24W 7240Lm Warm	1265
521923	ETA 902 Led 2x30W 9060Lm Warm	1565
521613	ETA 902 Led 2x37W 10700Lm Warm	1565

For dimmer version add letter “D” at the end of product code.




- Transparent tempered glass, sealing gasket, single-piece perimetrical frame in galvanized steel.

Code	Description	L
522873	ETA 912 Led 2x12W 3900Lm Neutral	655
522893	ETA 912 Led 2x24W 7800Lm Neutral	1265
522913	ETA 912 Led 2x30W 9740Lm Neutral	1565
522603	ETA 912 Led 2x37W 11460Lm Neutral	1565
522883	ETA 912 Led 2x12W 3620Lm Warm	655
522903	ETA 912 Led 2x24W 7240Lm Warm	1265
522923	ETA 912 Led 2x30W 9060Lm Warm	1565
522613	ETA 912 Led 2x37W 10700Lm Warm	1565

For dimmer version add letter “D” at the end of product code.

ETA

ETA 92

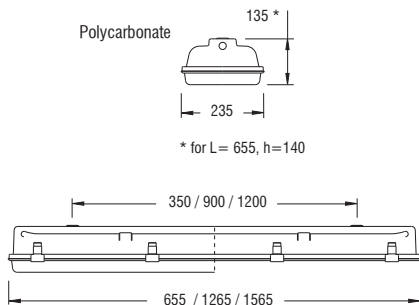

LUMINAIRES WITH EXTRA PROTECTION




- Diffuser in transparent self-extinguishing V2 **polycarbonate**, UV stabilised, injection moulded, with smooth outer surface and differentiated prismatic inner surface.

Code	Description	L
523873	ETA 922 Led 2x12W 3900Lm Neutral	655
523893	ETA 922 Led 2x24W 7800Lm Neutral	1265
523913	ETA 922 Led 2x30W 9740Lm Neutral	1565
523603	ETA 922 Led 2x37W 11460Lm Neutral	1565
523883	ETA 922 Led 2x12W 3620Lm Warm	655
523903	ETA 922 Led 2x24W 7240Lm Warm	1265
523923	ETA 922 Led 2x30W 9060Lm Warm	1565
523613	ETA 922 Led 2x37W 10700Lm Warm	1565

For dimmer version add letter “D” at the end of product code.

ETA 93

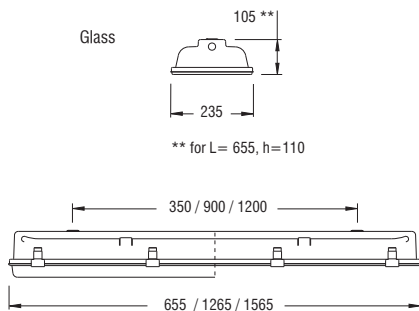

- Transparent tempered **glass**, sealing gasket, single-piece perimetrical frame in stainless steel.

Code	Description	L
524873	ETA 932 Led 2x12W 3900Lm Neutral	655
524893	ETA 932 Led 2x24W 7800Lm Neutral	1265
524913	ETA 932 Led 2x30W 9740Lm Neutral	1565
524603	ETA 932 Led 2x37W 11460Lm Neutral	1565
524883	ETA 932 Led 2x12W 3620Lm Warm	655
524903	ETA 932 Led 2x24W 7240Lm Warm	1265
524923	ETA 932 Led 2x30W 9060Lm Warm	1565
524613	ETA 932 Led 2x37W 10700Lm Warm	1565

For dimmer version add letter “D” at the end of product code.

ETA

LUMINAIRES WITH EXTRA PROTECTION





- Pair of hooks for suspended installation with nuts and bolts for luminaire fastening.

Code	Description
502304	13DH (galvanized steel) for 752-762 Series
502301	13HC (stainless steel) for 902-912-922-932 Series


MOUNTING BRACKETS



- Pair of mounting brackets and hooks for wall mounting with nuts and bolts for luminaire fastening, everything in stainless steel.

Code	Description
502303	15CD for 902-912-922-932 Series

WIRE- GUARD



- Wire-guard for applications in dry environments, against shocks coming from any directions, from steel rod $\varnothing 5\text{mm}$ painted in white colour.

Code	Description	Dimensions
201301	12 BX	280x1330x130
201304	12 LB	280x1630x130

ETA

LUMINAIRES WITH EXTRA PROTECTION

