



Due to its high system light output, LUNA ROUND LED can replace even a downlight with 2x32W TC-Del lamps. This compact luminaire is ideal for applications where diffuse light is needed.

Technical Features



- Outer ring from die-cast aluminium or steel in 235 version, painted electrostatically in selected colour or plated.
- Inner body from die-cast aluminium.
- High pure aluminium reflectors anodized.
- Crusiform louvre non-iridescent with parabolic blades made of pure aluminium.
- Special edition with high antiglare reflector.
- Protection glass available in silkscreen TRD, sandblast SB or Mistlite.
- Support to the ceiling with springs.
- Pure light without IR/UV radiation.
- Die cast aluminum heatsink anodized.
- Efficient thermal management.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Connection for operation with Constant Current.

Upon request:


Available with highest colour rendering index (CRI)

LUNA ROUND 210 / 235

LUNA ROUND 210 LED CHIP

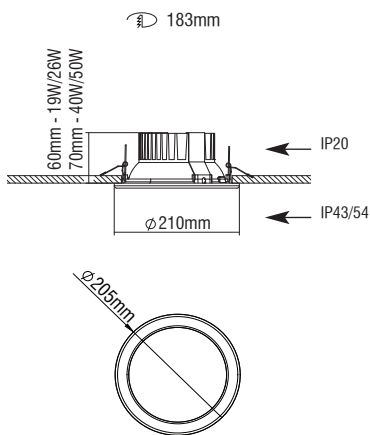

LUNA ROUND 210 Ring & Cover

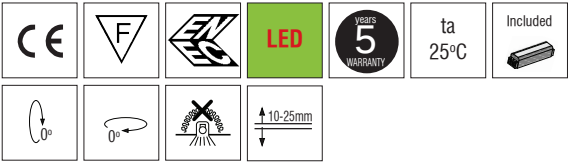

- Version for LED CHIP.
- Inner body from die-cast aluminium.
- 19W power consumption driven at 500mA.
- 26W power consumption driven at 700mA.
- 40W power consumption driven at 1050mA.
- 50W power consumption driven at 925mA.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
 - 19W: 4000 K: 156 Lm/Watt
 - 19W: 3000 K: 149 Lm/Watt
 - 26W: 4000 K: 154 Lm/Watt
 - 26W: 3000 K: 148 Lm/Watt
 - 40W: 4000 K: 141 Lm/Watt
 - 40W: 3000 K: 136 Lm/Watt
 - 50W: 4000 K: 160 Lm/Watt
 - 50W: 3000 K: 156 Lm/Watt

Code	Description	Kg
46662	LUNA ROUND 210 LED CHIP 19W	0,950
46663	LUNA ROUND 210 LED CHIP 26W	0,950
46664	LUNA ROUND 210 LED CHIP 40W	1,000
46665	LUNA ROUND 210 LED CHIP 50W	1,000

For dimmer version add letter “D” at the end of product code.



- Outer ring from die-cast aluminium.
- Sandblast methacrylate PMMA cover.



Code	Description	Kg
40029	LUNA ROUND RING 210 LED IP43 + COVER	0,180
40019	LUNA ROUND RING 210 LED IP54 + COVER	0,220

LUNA ROUND 210 / 235

LUNA ROUND 210 MV LED CHIP





Ø 183mm




LUNA ROUND 235 LED CHIP



Ø 210mm




Recessed Spotlights & Downlights

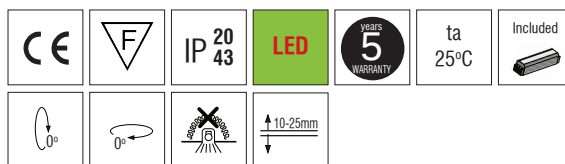

- Version for LED CHIP.
 - Inner body from die-cast aluminium.
 - Outer ring from die-cast aluminium.
 - Sandblast methacrylate PMMA cover, mounted inside.
 - No glare.
 - 19W power consumption driven at 500mA.
 - 26W power consumption driven at 700mA.
 - 40W power consumption driven at 1050mA.
 - 50W power consumption driven at 925mA.
 - CRI: min. 80 / SDCM: 3
 - Luminous Efficacy:
- | | | |
|------|---------|-------------|
| 19W: | 4000 K: | 156 Lm/Watt |
| 19W: | 3000 K: | 149 Lm/Watt |
| 26W: | 4000 K: | 154 Lm/Watt |
| 26W: | 3000 K: | 148 Lm/Watt |
| 40W: | 4000 K: | 141 Lm/Watt |
| 40W: | 3000 K: | 136 Lm/Watt |
| 50W: | 4000 K: | 160 Lm/Watt |
| 50W: | 3000 K: | 156 Lm/Watt |

Code	Description	Kg
466701	LUNA ROUND 210 MV LED CHIP 19W	1,000
466702	LUNA ROUND 210 MV LED CHIP 26W	1,000
466703	LUNA ROUND 210 MV LED CHIP 40W	1,100
466704	LUNA ROUND 210 MV LED CHIP 50W	1,100

For dimmer version add letter "D" at the end of product code.

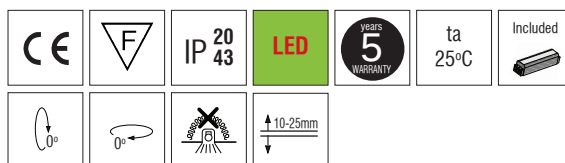

- Version for LED CHIP.
 - Inner body from die-cast aluminium.
 - Outer steel ring.
 - No glare.
 - 19W power consumption driven at 500mA.
 - 26W power consumption driven at 700mA.
 - 40W power consumption driven at 1050mA.
 - 50W power consumption driven at 925mA.
 - CRI: min. 80 / SDCM: 3
 - Luminous Efficacy:
- | | | |
|------|---------|-------------|
| 19W: | 4000 K: | 156 Lm/Watt |
| 19W: | 3000 K: | 149 Lm/Watt |
| 26W: | 4000 K: | 154 Lm/Watt |
| 26W: | 3000 K: | 148 Lm/Watt |
| 40W: | 4000 K: | 141 Lm/Watt |
| 40W: | 3000 K: | 136 Lm/Watt |
| 50W: | 4000 K: | 160 Lm/Watt |
| 50W: | 3000 K: | 156 Lm/Watt |

Code	Description	Kg
4553	LUNA ROUND 235 LED CHIP 19W	1,000
4551	LUNA ROUND 235 LED CHIP 26W	1,100
4554	LUNA ROUND 235 LED CHIP 40W	1,100
4552	LUNA ROUND 235 LED CHIP 50W	1,150




For dimmer version add letter "D" at the end of product code.

Recessed Spotlights & Downlights

LUNA ROUND 235 CROSS LED CHIP



210mm

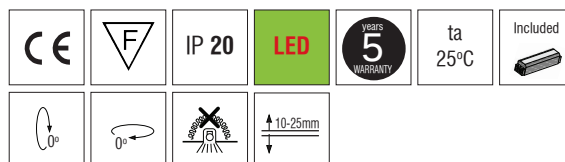

- Version for LED CHIP.
- Inner body from die-cast aluminium.
- Outer steel ring.
- No glare.
- 19W power consumption driven at 500mA.
- 26W power consumption driven at 700mA.
- 40W power consumption driven at 1050mA.
- 50W power consumption driven at 925mA.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
 - 19W: 4000 K: 156 Lm/Watt
 - 19W: 3000 K: 149 Lm/Watt
 - 26W: 4000 K: 154 Lm/Watt
 - 26W: 3000 K: 148 Lm/Watt
 - 40W: 4000 K: 141 Lm/Watt
 - 40W: 3000 K: 136 Lm/Watt
 - 50W: 4000 K: 160 Lm/Watt
 - 50W: 3000 K: 156 Lm/Watt

Code	Description	Kg
4645 	LUNA ROUND 235 CROSS LED CHIP 19W	1,000
4644 	LUNA ROUND 235 CROSS LED CHIP 26W	1,000
4646 	LUNA ROUND 235 CROSS LED CHIP 40W	1,100
4647 	LUNA ROUND 235 CROSS LED CHIP 50W	1,100

For dimmer version add letter “D” at the end of product code.

LED COLOUR CODES:
2 Warm **3** Neutral

Colour Codes:
0 Colours **1** White **2** Titan **3** Black **4** Chrome **5** matt Alum.