



The TRIMLESS version of SLOTLIGHT, with the diffuser position deeper from the ceiling level, gives the impression of an almost immaterial luminaire fully integrated to the ceiling. This architectural advantage, in combination with the perfect lighting conditions without annoying reflections, make the Trimless High System suitable for many different working areas (offices, houses, entrance areas etc).

It escapes also the restrictions of the T16 fluorescent lamps, by using LED lighting points that can have any spacing pitch, and this gives the light line enormous flexibility. The visual benefit: The continuous-row system is illuminated absolutely uniformly from beginning to end, is economically efficient, maintenance free and it has long service-life.

Technical Features

- Housing from aluminium profile, painted electrostatically in selected colour.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- Pure light without IR/UV radiation.
- Efficient thermal management.
- Connection for operation on 230V/50Hz.
- SDCM: 3 / Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).


Upon request:

- Connection for emergency lighting system, for one or three hours.

SLOTLIGHT TRIMLESS

PROFESSIONAL RECESSED LUMINAIRES

SLOTLIGHT TRIMLESS LED

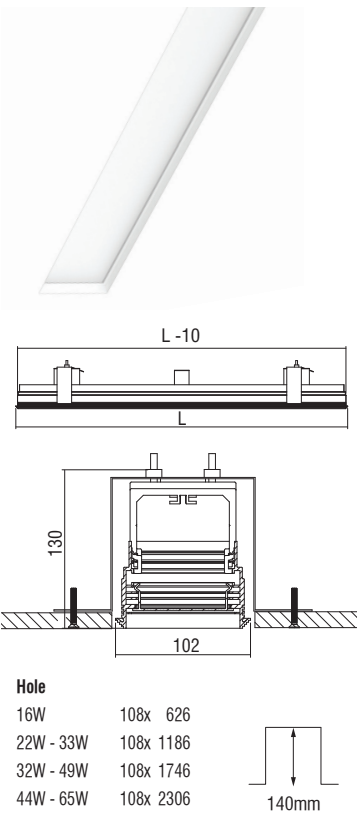


- Aluminium body.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- Suspension brackets not included.
- CRI: min. 80
- Luminous Efficacy:
201 Lm/Watt 4000K at 350mA
189 Lm/Watt 3000K at 350mA

Code	Description	L	Kg
92573	Slotlight Trimless Led 16W Neutral	620	1,320
92575	Slotlight Trimless Led 33W Neutral	1180	2,520
92577	Slotlight Trimless Led 49W Neutral	1740	3,700
92579	Slotlight Trimless Led 65W Neutral	2300	4,900
92580	Slotlight Trimless Led 16W Warm	620	1,320
92582	Slotlight Trimless Led 33W Warm	1180	2,520
92584	Slotlight Trimless Led 49W Warm	1740	3,700
92586	Slotlight Trimless Led 65W Warm	2300	4,900

For dimmer version add letter “D” at the end of product code.

SLOTLIGHT TRIMLESS ANAGLYPH LED

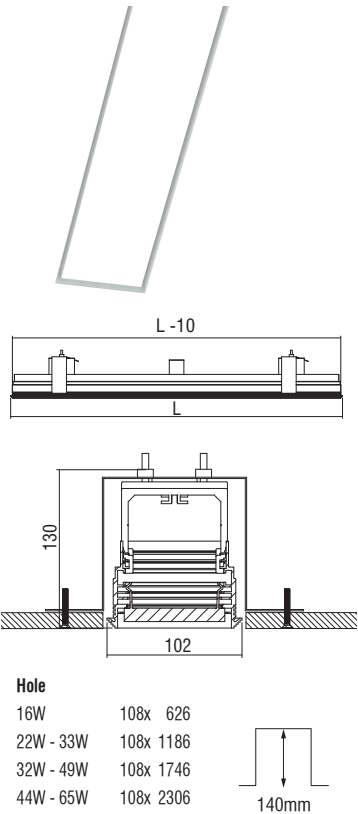

- Aluminium body.
- Diffuser in opal of 10mm PMMA.
- Flow recuperator in white colour.
- Suspension brackets not included.
- CRI: min. 80
- Luminous Efficacy:
201 Lm/Watt 4000K at 350mA
189 Lm/Watt 3000K at 350mA


Code	Description	L	Kg
92673	Slotlight Trimless An.Led 16W Neutral	620	2,140
92675	Slotlight Trimless An.Led 33W Neutral	1180	4,060
92677	Slotlight Trimless An.Led 49W Neutral	1740	5,990
92679	Slotlight Trimless An.Led 65W Neutral	2300	7,920
92680	Slotlight Trimless An.Led 16W Warm	620	2,140
92682	Slotlight Trimless An.Led 33W Warm	1180	4,060
92684	Slotlight Trimless An.Led 49W Warm	1740	5,990
92686	Slotlight Trimless An.Led 65W Warm	2300	7,920

For dimmer version add letter “D” at the end of product code.

SLOTLIGHT TRIMLESS

PROFESSIONAL RECESSED LUMINAIRES

SLOTLIGHT TRIMLESS + Module 50 IRA 2 Reflector

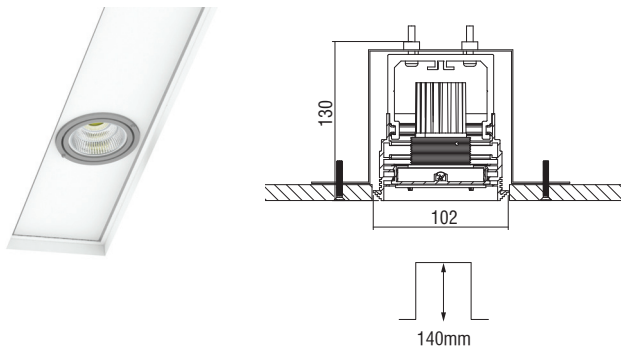


CE	F	IP 20	LED	850°C	5 years WARRANTY	ta 25°C	Included
25°	350°						

- Reflectors: Medium, Wide.
- 6W power consumption driven at 350mA.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
6W: 4000 K: 158 Lm/Watt
6W: 3000 K: 151 Lm/Watt

Code	Description	L	Kg
95207	Slotlight Trimless Module 50 1x IRA 2 6W Reflector	300	1,570
95208	Slotlight Trimless Module 50 2x IRA 2 6W Reflector	450	2,360

SLOTLIGHT TRIMLESS + Module 50 DIMITRA 2 Reflector HO

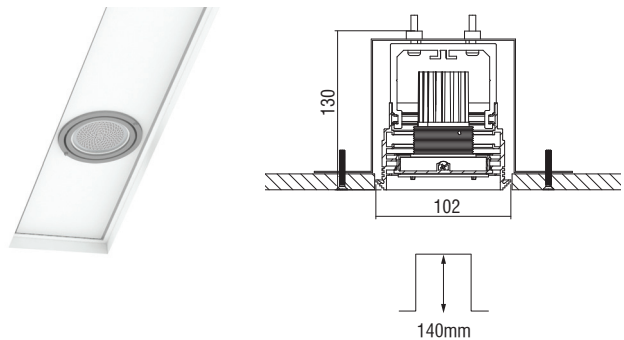


CE	F	IP 40	LED	850°C	5 years WARRANTY	ta 25°C	Included
25°	350°						

- Reflectors: Spot, Medium, Wide.
- 5W power consumption driven at 500mA.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
5W: 4000 K: 115 Lm/Watt
5W: 3000 K: 108 Lm/Watt

Code	Description	L	Kg
95209	Slotlight Trimless Module 50 1x DIMITRA 2 5W Ref.HO	300	1,570
95210	Slotlight Trimless Module 50 2x DIMITRA 2 5W Ref.HO	450	2,360

SLOTLIGHT TRIMLESS + Module 50 ARTEMIS 2 Diffuser Prismatic

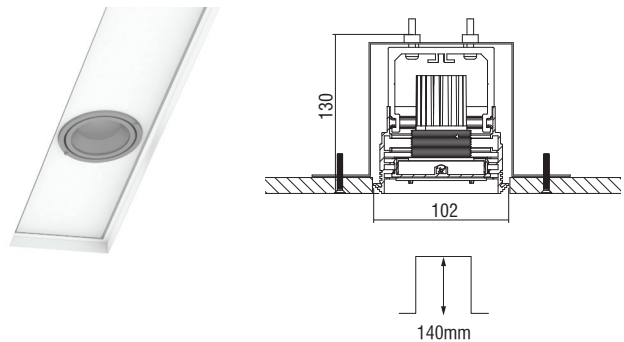

CE	F	IP 40	LED	850°C	5 years WARRANTY	ta 25°C	Included
25°	350°						



- Beam: Diffuser.
- 5W power consumption driven at 500mA.
- 6W power consumption driven at 350mA.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
5W: 4000 K: 115 Lm/Watt, CRI: min. 80
5W: 3000 K: 108 Lm/Watt, CRI: min. 80
6W: 4000 K: 158 Lm/Watt, CRI: min. 80
6W: 3000 K: 151 Lm/Watt, CRI: min. 80

Code	Description	L	Kg
95211	Slotlight Trimless Module 50 1x ARTEMIS 2 5W Diffuser Prism.	300	1,570
95212	Slotlight Trimless Module 50 2x ARTEMIS 2 5W Diffuser Prism.	450	2,360
95213	Slotlight Trimless Module 50 1x ARTEMIS 2 6W Diffuser Prism.	300	1,570
95214	Slotlight Trimless Module 50 2x ARTEMIS 2 6W Diffuser Prism.	450	2,360

SLOTLIGHT TRIMLESS

PROFESSIONAL RECESSED LUMINAIRES



SLOTLIGHT TRIMLESS + Module 50 ATHINA 2 Diffuser Opal

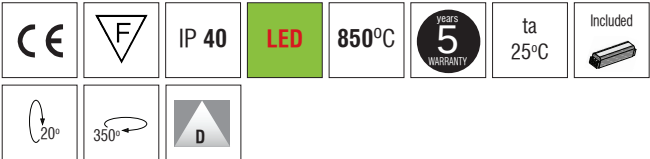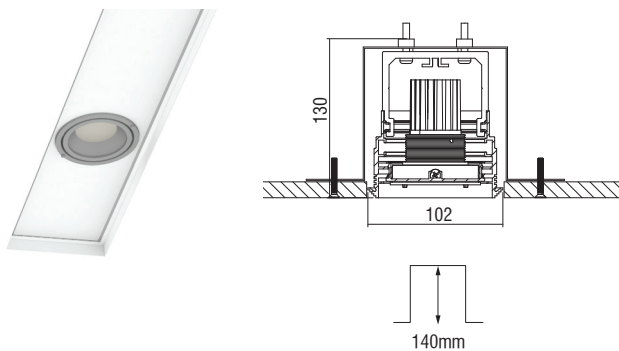

- Beam: Diffuser.
- 5W power consumption driven at 500mA.
- 6W power consumption driven at 350mA.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
 - 5W: 4000 K: 115 Lm/Watt
 - 5W: 3000 K: 108 Lm/Wat
 - 6W: 4000 K: 158 Lm/Watt
 - 6W: 3000 K: 151 Lm/Watt

Code	Description	L	Kg
95215 00	Slotlight Trimless Module 50 1x ATHINA 2 5W Diffuser Opal	300	1,570
95216 00	Slotlight Trimless Module 50 2x ATHINA 2 5W Diffuser Opal	450	2,360
95217 00	Slotlight Trimless Module 50 1x ATHINA 2 6W Diffuser Opal	300	1,570
95218 00	Slotlight Trimless Module 50 2x ATHINA 2 6W Diffuser Opal	450	2,360

SLOTLIGHT TRIMLESS + Module 50 VENUS 2 Lens

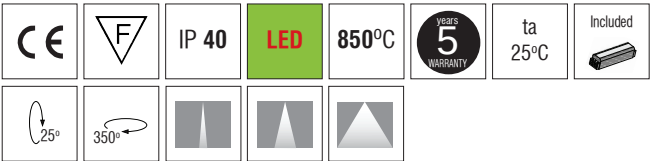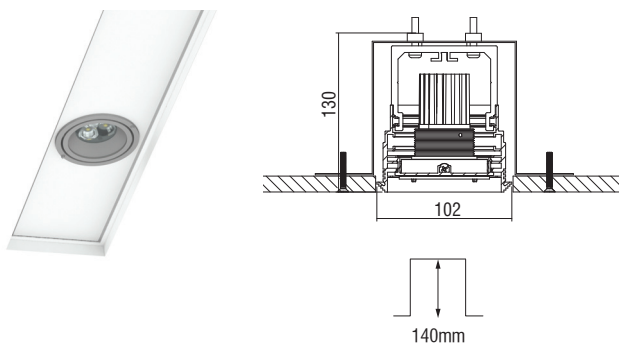



- Lens: Spot, Medium, Wide.
- 3W power consumption driven at 350mA.
- 6W power consumption driven at 700mA.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
 - 3W: 4000 K: 164 Lm/Watt
 - 3W: 3000 K: 154 Lm/Watt
 - 6W: 4000 K: 152 Lm/Watt
 - 6W: 3000 K: 142 Lm/Watt

Code	Description	L	Kg
95219 00	Slotlight Trimless Module 50 1x VENUS 2 3W/6W Lens	300	1,570
95220 00	Slotlight Trimless Module 50 2x VENUS 2 3W/6W Lens	450	2,360

SLOTLIGHT TRIMLESS

PROFESSIONAL RECESSED LUMINAIRES



SLOTLIGHT TRIMLESS + Module 30 Lens

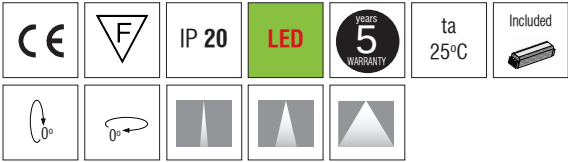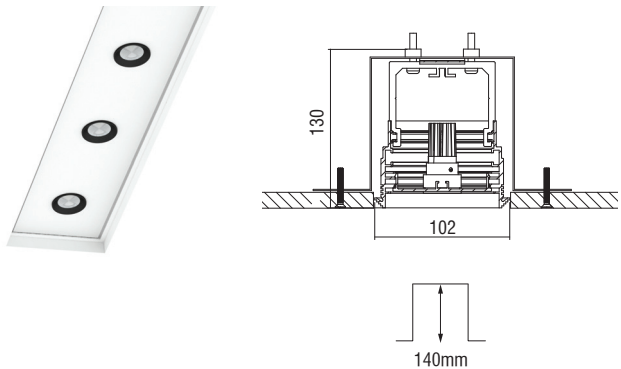

- Aluminium body.
- Lens in Spot, Medium, Wide selection.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
2W: 152 Lm/Watt at 4000K 700mA
2W: 142 Lm/Watt at 3000K 700mA

Code	Description	L	Kg
95221	Slotlight Trimless Module 30 1x2W Lens	240	1,260
95222	Slotlight Trimless Module 30 2x2W Lens	320	1,680
95223	Slotlight Trimless Module 30 3x2W Lens	400	2,100

SLOTLIGHT TRIMLESS + Module 30 Reflector

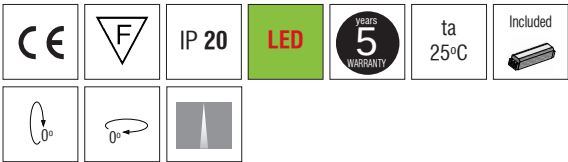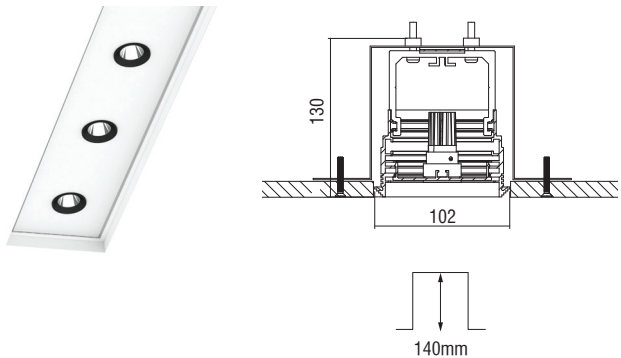


- Aluminium body.
- Spot reflector selection.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
2W: 152 Lm/Watt at 4000K 700mA
2W: 142 Lm/Watt at 3000K 700mA

Code	Description	L	Kg
95224	Slotlight Trimless Module 30 1x2W Reflector	240	1,260
95225	Slotlight Trimless Module 30 2x2W Reflector	320	1,680
95226	Slotlight Trimless Module 30 3x2W Reflector	400	2,100

LED COLOUR CODES: 2 Warm 3 Neutral	BEAM CODES: 01 spot 02 medium 03 wide	Colour Codes: 0 Colours 1 White 2 Titan 3 Black
--	---	---

SLOTLIGHT TRIMLESS BRACKET

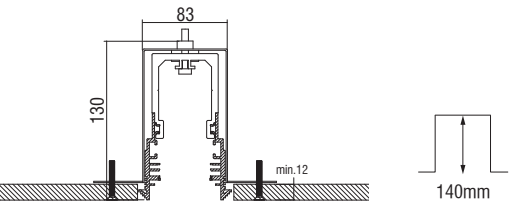

- Metal suspension bracket.
- Required 1pc per 1m profile length.

Code	Description	Kg
900510	Suspension Bracket Slotlight Trimless	0,270

SLOTLIGHT TRIMLESS

PROFESSIONAL RECESSED LUMINAIRES

